

Miele's Little Giants for Small scale laundry operations

Washer extractor PW 6055 and PW 6065

Tumble dryer PT 7135 C and PT 7136

Rotary ironer HM 16-80 and HM 16-83



Miele's Little Giants

Taking care of your laundry



In the professional world of laundry care there are many different types of businesses requiring flexible systems for processing a wide variety of textiles and soiling from hairdressers and beauty salons, to sports centres, hotels and guesthouses. They also play a vital, supportive role in larger operations including commercial laundries and dry cleaners.

Mountains of laundry, frequent washing and stubborn soiling can prove too much for the average washing machine and tumble dryer, resulting in inefficient energy consumption and unnecessary expenditure on electricity, water and detergent, not to mention excessive wear and tear to the fabric of the machine with the potential for costly repairs.

Miele's LITTLE GIANTS are designed and built to be used on a frequent daily basis and keep your laundry clean and in good condition. These innovative washing machines and tumble dryers are the perfect solution for laundry operations requiring reliable professional equipment to process laundry efficiently and as economically as possible.

Washing

Miele's Little Giants, PW 6055 and PW 6065, are the ideal washing machines for small, in-house laundries. Featuring a wide range of standard programmes they also offer a good selection of additional functions and programmes to suit a wide range of applications.

Tested and approved by the Water Regulation Advisory Scheme, these machines can be connected to mains water in any application, including category 5 high risk establishments e.g. nursing homes, in accordance with Water Supply (Water Fittings) Regulations 1999.



Drying

The perfect complement to Miele's PW 6055 and PW 6065 washer-extractors are the 6.5 kg capacity tumble dryers with a range of highly developed drying programmes to ensure your laundry gets the best treatment possible. The reverse action drum ensures energy efficient drying with tangle-free results, and the electronic sensing system takes the guesswork out of selecting the right drying level.

Ironing

Miele's compact HM 16-80 and HM 16-83 rotary ironers provide the perfect finishing touch for your in-house laundry. They can cope with up to 15 kg of flatwork per hour and because they take up very little space, can be sited against a wall where they are easy for one operator to use.

Miele adding value!

Better know-how, Better quality, Better service

Miele can look back on decades of experience in developing washer-extractors and cleaning processes. The concepts and features of Miele's professional up-to-the minute washer-extractors, tumble dryers and high throughput rotary ironers are based on this experience. The advantage to the customer is that every establishment can be given comprehensive advice and a thorough analysis of its operating and economic requirements. Even the installation of the machines can be planned down to the smallest detail, including drawings where required.

Better know-how

Miele offers technologically advanced products that are made in compliance with DIN EN ISO 9001. Solid construction, high quality materials, sophisticated technology and excellence of finish with electronic components that are designed and made in-house guarantee the legendary longevity of Miele machines. Every machine undergoes a visual, functional and safety test before leaving the factory. The reliability of all components and patented technologies are further examples of Miele's quality and technical innovations.

Miele products have been singled out for their quality and reliability in numerous tests, including Most trusted and Best brand in 2007.

Better quality



From start to finish, Miele is the professional partner for your laundry – perfect laundry care for satisfied customers. Easy access to Miele ensures prompt attention for all enquiries, while Miele's network of sales and service centres guarantees fast assistance when help is needed. Special maintenance and service contracts ensure down-time is minimised and provides extra peace of mind.

Better service

Miele

PROFESSIONAL

Miele's Little Giants

Washer-extractors: features and benefits



PW 6065

WRAS
APPROVED
PRODUCT

Quality build

Miele machines are all made with the highest quality materials and expert craftsmanship. All components, from the shock absorbers on the drum cradle to the drum bearings and the electronic imbalance monitor for the spin cycle are quality tested to ensure many years of good service. The housing is available in a choice of either high-grade stainless steel or a high-quality vitreous direct enamel which is resistant to corrosion, yellowing and chipping.

Spaceframe construction

Many machines are awkward to service because opening them to access components is a lengthy process. With a MIELE LITTLE GIANT the front, sides and lid are easily removed by undoing a few screws, so all major working parts are easy for a service engineer to access.

Patented Honeycomb drum

Miele's unique patented Honeycomb drum is made from high-grade stainless steel. With a sculptured surface, a thin film of water cushions the garments in the drum to reduce fibre breakage and pilling. The specially designed drum ribs together with optimised drum rhythms help drench the laundry quickly so programme durations are shorter, water consumption levels are kept down and your laundry gets the best possible care.

Large capacity drum with drum lighting

The new drums have a maximum load capacity of 5.5 kg (PW 6055) or 6.5 kg (PW 6065) dry weight and are ideal for the efficient processing of large quantities of laundry. With a 30 cm wide door aperture, access for loading and unloading has been improved, and because the drum has integrated lighting there is no danger of leaving something behind when unloading it.

Efficient professional motor

The powerful asynchronous motor with its frequency-controlled drive system enables a gentle run-up to spin and high spin speeds to be achieved. A patented two-stage imbalance sensing system guarantees optimum laundry distribution during spinning, ensures maximum spinning performance and is a contributing factor to the legendary longevity of Miele machines. With a G-factor of 526, water extraction is also very efficient enabling laundry to be dried quickly and efficiently in the tumble dryer afterwards.

Individual solutions for individual requirements

Up to 4 liquid detergent dispensing pumps can be connected to the machine for simple, precise and economical dispensing. The machines can also be connected to a payment system.

PROFITRONIC controls

Miele's PROFITRONIC controls offer a wide range of standard programmes as well as a number of special ones for dealing with a wide range of fabrics and particular requirements e.g. Kitchen linen, Table linen, Curtains, Pillows, Outerwear and Proofing. With additional features such as programme delay and a time left display these machines enable the user to manage their time efficiently.

Short programme durations

Quick wash programmes enable fast processing times and efficient laundry turnaround. More programmes can be run daily so you can maintain smaller stocks of linen.

Healthcare applications

Dump valve drain versions feature two sluice and thermal disinfection programmes meeting Department of Health guidelines HSG (95) 18, and conform to the requirements of The Care Standard Act 2000.

Washer dryer stack

Where space is at a premium a Miele tumble dryer can be stacked on top of the washer-extractor using a special stacking kit. This option only requires 600 x 700 mm of floor space!



Miele's Little Giants

Washer-extractors: Operating systems and programmes



Controls/programmes

Miele's Little Giants offer a choice of PROFITRONIC L or PROFITRONIC L PLUS³ controls. With a multi-function selector, these machines are very easy to use. Turning the selector brings up different options, and pressing the selector confirms the choice. Plus 3 models also offer 4 short-cut buttons. Together with a clear text display these machines are intuitive to use and the language can even be selected from a list of 21 different ones.

Each programme has its own set wash temperature and spin speed, which can be altered if required. The special Hygiene programmes meet required disinfection standards for sensitive areas such as clinics, doctors' surgeries, old people's homes and care homes. And dry cleaning establishments and commercial laundries benefit from the individually adapted wash parameters as well as the option of connecting liquid detergent dispenser pumps.

These machines can also be equipped payment systems making them ideal for use in communal laundries.

Standard programmes	PW 6065	PW 6055 Plus	PW 6065 Plus	PW 6065 Plus Sluice
Sluice high	-	-	*	•
Sluice low	-	-	*	•
Cottons Hygiene	95°C	70°C-95°C	70°C-95°C	70°C-95°C
Cottons Universal	40°C/60°C	Cold-60°C	Cold-60°C	Cold-60°C
Minimum Iron	30°C/40°C/60°C	30°C-60°C	30°C-60°C	30°C-60°C
Delicates	30°C	30°C-60°C	30°C-60°C	30°C-60°C
Quick wash	-	Cold-40°C	Cold-40°C	Cold-40°C
Woolens	30°C	Cold-30°C	Cold-30°C	Cold-30°C
Silks	-	Cold-30°C	Cold-30°C	Cold-30°C
Shirts	-	Cold-60°C	Cold-60°C	Cold-60°C
Denim	40°C	Cold-40°C	Cold-40°C	Cold-40°C
Towelling	-	60°C-95°C	60-95°C	60-95°C
Spin	•	•	•	•
Drain	•	•	•	•

Special programmes (selectable only via the Settings/Supervisor level menu)				
Kitchen linen	60°C	60°C-95°C	60°C-95°C	60°C-95°C
Table linen	40°C	30°C-60°C	30°C-60°C	30°C-60°C
Curtains	30°C	Cold-40°C	Cold-40°C	Cold-40°C
Pillows	60°C	40°C-95°C	40°C-95°C	40°C-95°C
Outerwear	40°C	Cold-40°C	Cold-40°C	Cold-40°C
Proofing	40°C	30°C-40°C	30°C-40°C	30°C-40°C
Hygiene	-	•	•	•
Thermal disinfection	-	85°C	85°C	85°C

* N.B. The sluice programmes are available via the settings / supervisor level menu on this machine, but only if it is equipped with a Dump valve. They must not be used on Drain pump version machines!

Miele's Little Giants

PROFITRONIC L and PROFITRONIC L PLUS³

PROFITRONIC L controls

Miele's Little Giants with PROFITRONIC L controls are simple to operate with a multi-function selector and a start button. Turning the selector brings up different options in the display, and pressing the selector confirms your choice. All that's left to do is press the start button.



PROFITRONIC L PLUS³ type 1

This control type enables washer-extractors to be operated with the multi-function selector and the short-cut buttons. The user has the full range of programmes to choose from, and the ability to change programme parameters to suit particular needs. They also have the option of selecting a pre-wash or a more intensive wash for each programme. This type of control suits businesses where the same personnel operate the machine on a daily basis.



PROFITRONIC L PLUS³ type 2

With this control type 4 wash programmes are allocated to the 4 short-cut keys. The 4 programmes are set up once by the supervisor. To start a programme the user simply has to press the appropriate short-cut key followed by the Start button. It couldn't be simpler! This type of control is ideal for machines that are used in communal laundries such as those found in sheltered housing, halls of residence and small businesses.



PROFITRONIC L PLUS³ type 3

This control type is a compromise between types 1 and 2 above. The three most frequently used wash programmes are allocated to 3 of the short-cut keys. The 4th short-cut key is used for calling up a further 9 programmes. With 12 programmes to select from machines with this type of controller are ideal for those situations where users need more choice than can be offered by Control type 2, but not as much as on Control type 1.



Miele's Little Giants

Tumble dryers: features and benefits



Large filter in the new dryers



PT 7136

Patented Honeycomb drum

The hexagonal pattern in the drum on the tumble dryers is convex, creating air pockets to gently catch and cushion the laundry as it tumbles to the bottom of the drum. This allows warm air to surround the laundry enabling more efficient drying. And with less friction between fabric and the drum, laundry comes out smoother and less creased, so finishing is easier too.

Large area fluff filter

The large surface area of fluff filter on the vented dryer is capable of collecting the fluff from up to 16 drying cycles (depending on the type of fabric being dried).

Vented or Condenser?

MIELE'S LITTLE GIANT tumble dryers are available in both vented and condenser versions. The condenser tumble dryers also have a pump-away facility to drain the condensate through a waste pipe at the rear which can be connected to a sink, drain outlet, etc. So whatever the site conditions there's a dryer to suit!

Winning combination

MIELE'S LITTLE GIANT tumble dryers with their extremely short programme durations and large drum capacity enable large quantities of laundry to be processed quickly and efficiently. With short turnaround times you can reduce the amount of time spent processing laundry each day.

Spaceframe construction

Many machines are awkward to service because opening them to access components is a lengthy process. With a MIELE LITTLE GIANT the front, sides and lid are easily removed by undoing a few screws, so all major working parts are easy for a service engineer to access.

Installation friendly

Where space is at a premium the tumble dryer can be stacked on top of a Miele washer-extractor using a special stacking kit. (See illustration on page 5). This option only requires 600 x 700 mm of floor space!


PROFITRONIC L controls

New PROFITRONIC L electronic controls with multi-function selector and user navigation allow easy programme selection of a wide suite of programmes to cater for all your laundry needs. A large clear text display also shows useful information such as how long a programme has left to run, and a 24h delay start features enables the user to choose when they want to run a programme, facilitating efficient time management.

Timed drying or sensor drying

An electronic moisture sensor constantly monitors the residual moisture level of the load in the sensor drying programmes ensuring that laundry is gently tumbled to the exact degree of dryness required. Where timed drying is preferred there is the choice of a cool air or hot air timed drying programme.

Programme chart PT 7135 C, PT 7135 C Plus, PT 7136 and PT 7136 Plus		
Standard programmes	Settings	Low temperature option
Cottons	Extra dry; Normal +; Normal; Hand iron ♣; Hand iron ♣♣; Machine iron	Yes
Minimum Iron	Normal +; Normal; Hand iron ♣,	Yes
Denim	Normal; Hand iron ♣,	No
Shirts	Normal; Hand iron ♣,	No
Outerwear	Normal; Hand iron ♣,	No
Towelling	Normal +	No
Woolens handcare		No
Smoothing		No
Proofing		No
Cool air	Timed drying	No
Warm air	Timed drying	Yes

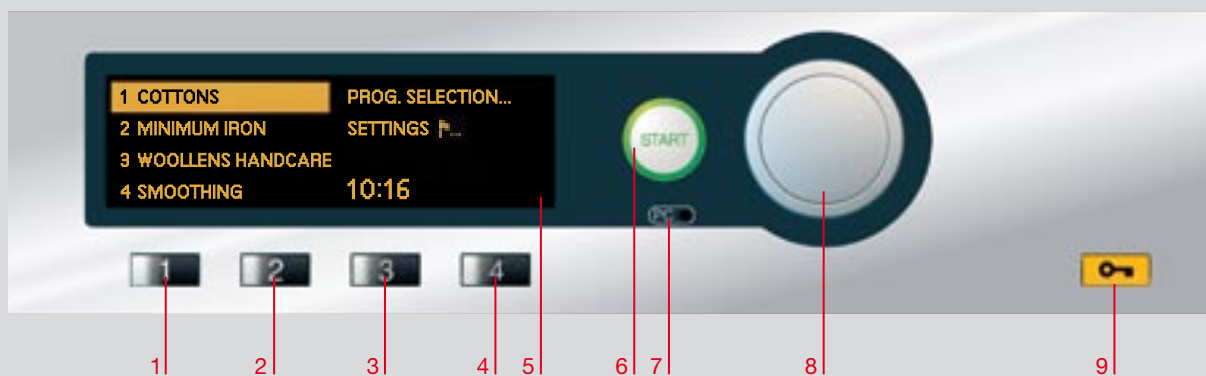

PROFITRONIC L

- 1-4 Short cut buttons (PLUS versions only)
- 5 Display
- 6 Start
- 7 Optical interface for PC
- 8 Multifunction dial for selecting and confirming features
- 9 Door button

Miele's Little Giants

PW 6055 and PW 6065 washer-extractors

Miele's compact washer-extractors with honeycomb drum are ideal for the small, professional in-house laundry – or the perfect additional machine for larger establishments.



PW 6065 washer-extractor

- Load capacity 6.5 kg
- Honeycomb drum, volume 59 litres
- Spin speed 1400 rpm
- g-factor 526, residual moisture 50%
- Available with stainless steel lid, front and sides

Controls

- Profitronic L controls
16 programmes
21 language choices
- Door release button



PW 6055 Plus washer-extractor

- Load capacity 5.5 kg
- Honeycomb drum, volume 54 litres
- Spin speed 1400 rpm
- g-factor 526, residual moisture 50%
- Available with stainless steel lid and white front and sides

PW 6065 Plus washer-extractor

- Load capacity 6.5 kg
- Honeycomb drum, volume 59 litres
- Spin speed 1400 rpm
- g-factor 526, residual moisture 50%
- Available with stainless steel lid and white front and sides

Controls

- **PROFITRONIC L Plus** controls
24 special programmes
4 short-cut keys
21 language choices
- Door release button

Construction

- Can be installed free-standing or in a stack with the matching tumble dryer
- Asynchronous motor with frequency converter
- Electric heating
- 2 special heating elements
- Hot and cold water connections
- Drain pump (LP) or dump valve (AV) depending on model
- Stainless steel suds container and patented honeycomb drum
- Drum lighting
- All parts coded for recycling

Wash system

- Flowmeter controlled water intake
- Patented honeycomb drum
- Scoop and ladle system for rapid drenching of laundry
- Gentle drum acceleration and imbalance monitoring

Additional features

- Connection points for up to 4 liquid dispensers
- Can be fitted with an optional payment system
- Optical interface for PC connection



Miele's Little Giants

PT 7135 C and PT 7136 tumble dryers

Miele's compact dryers with honeycomb drum are the perfect combination for the Little Giant washer-extractors.



PT 7135 C

- Condenser drying system, with drain hose at rear of dryer
- Load capacity 6.5 kg
- Honeycomb drum, volume 130 litres
- Available with stainless steel lid, front and sides

PT 7136

- Vented drying system
- Load capacity 6.5 kg
- Honeycomb drum, volume 130 litres
- Available with stainless steel lid, front and sides

Controls

- Profitronic L controls
11 programmes
21 language choices
- Door release button



PT 7135 C Plus

- Condenser drying system, with drain hose at rear of dryer
- Load capacity 6.5 kg
- Honeycomb drum, volume 130 litres
- Available with stainless steel lid and white front and sides

PT 7136 Plus

- Vented drying system
- Load capacity 6.5 kg
- Honeycomb drum, volume 130 litres
- Large surface area filter
- Available with stainless steel lid and white front and sides

Controls

- Profitronic L PLUS controls
11 programmes
21 language choices
- 4 short-cut keys
- Door release button

Construction

- Can be installed free-standing or in a stack above the matching washer-extractor
- Electric heating
- Stainless steel patented honeycomb drum
- Drum lighting
- All parts coded for recycling

Drying system

- Sensitive drying system for precise monitoring of residual moisture levels
- Timed drying

Additional features

- Can be fitted with an optional payment system
- Optical interface for PC connection



The perfect finish with small, compact rotary ironers

Rotary ironers create the perfect finishing touch to the in-house laundry: they are easy to use, and provide a high standard of finish to a wide range of flatwork. The two ironers featured here are both return feed models which require little space for installation and can be operated by one person.



HM 16-80 and HM 16-83:

Features

- Roller diameter 160 mm
- Roller length 830 mm
- Electric heating
- Output up to 15 kg/h at 20% residual moisture

Controls

- Freely selectable temperatures
- Freely selectable roller speed

Construction

- Feed-in and return of laundry to the front
- Can be installed against a wall
- Aluminium heater plate
- Polyester needle felt roller padding with ARAMID needle-felt cloth
- Foot operated control bar
- Chrome laundry rail

Safety features

- Patented finger guard
- Manual separation of heater plate from roller in event of a power cut
- Temperature limiter

Installation

- Simple connection with 13 A moulded plug



HM 16-80:

- H x W x D: 960 x 985 x 380 mm
- Folding frame for easy storage
- Water reservoir for steam finishing
- Open roller end for versatility


HM 16-83:

- H x W x D: 960 x 1050 x 380 mm
- Twin support roller

Model number	HM 16-80	HM 16-83
Roller diameter (mm)	160	160
Roller length (mm)	830	830
Aluminium heater plate	•	•
Cover: polyester-needle felt/Aramid needle felt cloth	•	•
Heating, electric (EL)	EL	EL
Electrical connection		
AC 220–240 V 50–60 Hz	•	•
Heater rating [kW]	2.6–3.1	2.5–3.0
Total connected load [kW]	2.7–3.2	2.6–3.1
Fuse rating [A]	1x13	1x13
Output		
Roller speed (m/min)	2–4.5	2–4.5
Roller speed (rpm)	4–9	4–9
20% residual moisture (up to kg/h)	15	15
Laundry return feed		
To the front	•	•
Dimensions, weight		
External dimensions H/W/D (mm)	960/985/380	960/1050/380
Height when folded	1052	–
Width when folded	500	–
Weight (kg)	39	38

Output figures according to DIN 11 902

The output levels achieved in practice are on average 20-40% lower than the maximum output level. The actual output depends on the skill and experience of the operator, the type of laundry being handled, how it is pre-sorted, the condition of the rotary ironer and the standard of finish required.

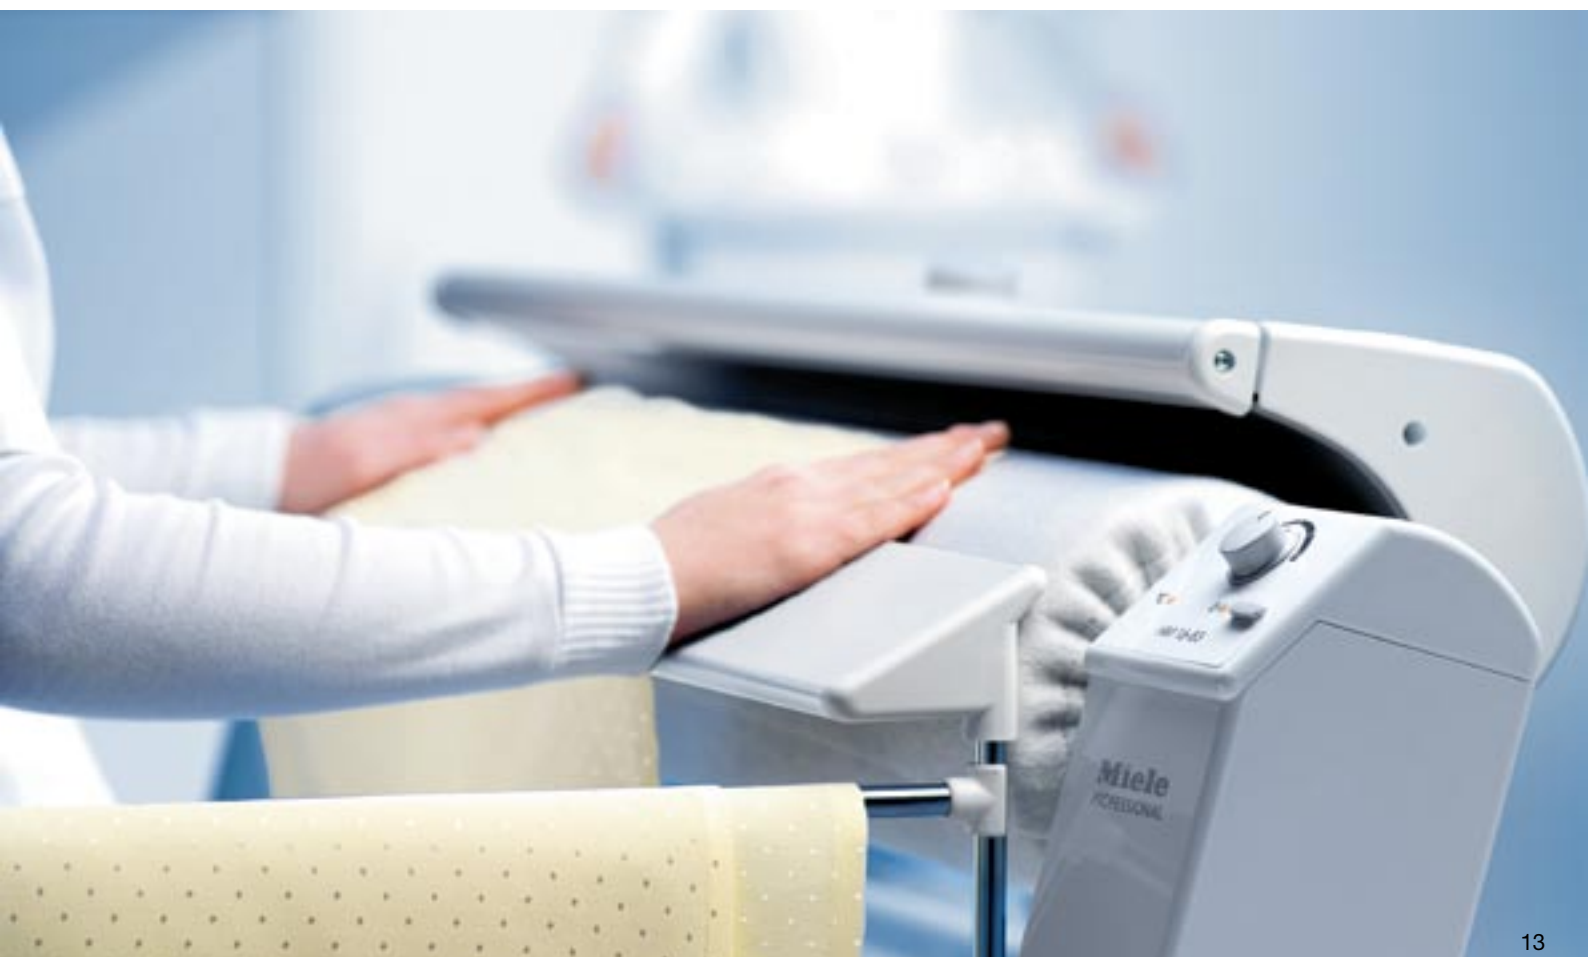

Washer-extractors

Load capacity 5.5 and 6.5 kg

Washer-extractor	PW 6055 Plus	PW 6065	PW 6065 Plus
Capacity [kg]	5.5	6.5	6.5
Honeycomb drum, volume [litres]	54	59	59
Spin speed [max. rpm]	1400	1400	1400
g-Factor	526	526	526
Residual moisture [%]	50	50	50
Controls/Programmes			
PROFITRONIC L	–	•	–
PROFITRONIC L PLUS, delay start up to 24 hours	•	–	•
Plumbing			
Cold water, 1/2" with 3/4" threaded union	•	•	•
Hot water, 1/2" with 3/4" threaded union	•	•	•
Drain pump DN 22	•	•	•
Dump valve DN 70	–	–	•
Electrical connection			
Asynchronous motor with frequency converter	•	•	•
2N AC 400 V 50 Hz – with cable			
Heater rating [kW]	5.3	5.3	5.3
Total connected load [kW]	5.5	5.5	5.5
Fuse rating [A]	2 x 13	2 x 13	2 x 13
1N AC 230 V 50 Hz – with cable and plug			
Heater rating [kW]	2.65	–	–
Total connected load [kW]	2.85	–	–
Fuse rating [A]	1 x 13	–	–
1N AC 230 V 50 Hz – with cable			
Heater rating [kW]	4.85–5.8	4.85–5.8	4.85–5.8
Total connected load [kW]	5.05–6.0	5.05–6.0	5.05–6.0
Fuse rating [A]	1 x 30	1 x 30	1 x 30
Detergent dispenser			
3 compartment dispenser drawer	•	•	•
Optional extras			
Dispenser for liquid agent	◦	◦	◦
Payment system	•	•	•
Dimensions, weight			
External dimensions H/W/D [mm]	850/600/730	850/600/730	850/600/730
Weight [kg]	106	108	108
Suitable for stacking	•	•	•
External finish options			
Lid and fascia stainless steel, front and sides lotus white	•	–	•
Lid, fascia, front and sides stainless steel	–	•	–

• = standard feature

◦ = optional

– = not available

Miele Company Limited
Fairacres
Marcham Road
Abingdon
Oxon OX14 1TW

Telephone: (01235) 554455
Telefax: (01235) 554477

Internet: www.miele-professional.co.uk
E-mail: info@miele.co.uk

Miele worldwide:

AUSTRALIA
Miele Australia Pty. Ltd.
1 Gilbert Park Drive
Knoxfield, VIC, 3180
Tel. +61(0)3/97 64 71 30
Telefax +61(0)3/97 64 71 49

AUSTRIA
Miele Gesellschaft mbH.
Mielestraße 1
5071 Wals/Salzburg
Tel. +43(0)50 800-81 481
Telefax +43(0)50 800-81 429

BELGIUM
N.V. Miele S.A.
2.5 Mollem 480
Hof te Bollebeeklaan 9
1730 Mollem
Tel. +32(0)2/451.14.11
Telefax +32(0)2/451.14.14

CANADA
Miele Limited
161 Four Valley Drive
Vaughan, ON L4K 4V8
Toll free: (800) 643-5381
Tel. (905) 660-9936
Telefax (905) 532-2290

CHILE
Miele Electrodomeísticos Ltda.
Av. Vitacura 3285
Vitacura
Santiago de Chile
Tel. +56 2 2077171
Telefax +56 2 2065676

CHINA
Miele Beijing Rep. Office
3W Suite 512, Oriental Plaza,
1 East Chang An Avenue
Dong Cheng District
Beijing 100738, P.R. China
Tel. +86 10 85151919
Telefax +86 10 85181797

Miele Shanghai Rep. Office
Suite 4105-06, Plaza 66
1266 Nanjing Road West
Shanghai 200040, P.R. China
Tel. +86 21 62884200
Telefax +86 21 62884100

CROATIA
Miele d.o.o.
Buzinski prilaz 32
10000 Zagreb
Tel. +385/1/66 89 000
Telefax +385/1/66 89 090

CZECH REPUBLIC
Miele spol. s.r.o.
Hněvkovského 81B, 61700 Brno
Tel. +420(0)5/4 35 53-1 11
Telefax +420(0)5/4 35 53-1 19

DENMARK
Miele A/S
2600 Glostrup, Erhvervsvej 2
Tel. +45 43 27 11 00
Tel. Salg/Professional
+45 43 27 15 00
Tel. Jylland +45 97 12 70 66
Telefax hovednr. +45 43 27 11 09
Telefax Salg/Professional
+45 43 27 15 09

FINLAND
Miele Oy
Porttikaari 6, 01200 Vantaa
Tel. +358(0)9/87 59 70
Telefax +358(0)9/87 59 72 99

FRANCE
Miele S.A.S.
9 avenue Albert Einstein
93151-Le Blanc-Mesnil (Paris)
Tel. +33(0)1/49 39 34 44
Telefax +33(0)1/49 39 44 37

GERMANY
Miele & Cie. KG
Carl-Miele-Straße 29
33332 Gütersloh
Tel. 0 180 220 21 21 (6 ct)*
Telefax 0 800 225 57 55
*Only in Germany

GREAT BRITAIN
Miele Co. Ltd. Fairacres
Marcham Road, Abingdon
Oxon OX14 1TW
Tel. +44(0)12 35/55 44 55
Telefax +44(0)12 35/55 44 77

GREECE
Miele Hellas GmbH
Mesogion 257
154 51 N. Psychiko-Athen
Tel. national 01/10 6 79 44 44
international 00 30/2/10 6 79 44 44
Tel. 01/10 6 79 42 09
international 00 30/2/10 6 79 42 09

HUNGARY
Miele Kft.
Alsó Törökvész út 2.
1022 Budapest
Tel. +36 (0)6 1 8806-400
Telefax +36 (0) 1 8006-402

HONG KONG
Miele Hong Kong Ltd.
AIA Plaza, 24th Floor,
18 Hysan Avenue,
Causeway Bay, Hong Kong
Tel. +852/26101331
Telefax +852/26101013

IRELAND
Miele Ireland Ltd.
Broomhill Road
Tallaght, Dublin 24
Tel. +353(0)1/461 07 10
Telefax +353(0)1/461 07-97

ITALY
Miele Italia S.r.l.
Strada di Circonvallazione, 27
39057 S. Michele-Appiano (BZ)
Tel. +39 04 71/66 61 11
Telefax +39 04 71/66 63 50

JAPAN
Miele Japan Corp.
E Space Tower 11F
3-6 Maruyamacho
Shibuya-ku Tokyo
150-0044 Japan
Tel. +81(3)5784-0030
Telefax +81(3)5784-0035

KOREA
Miele Korea Limited
Miele Haus, 607-10 Yeoksam-dong
Gangnam-gu
Seoul 135-080
Tel. +82 2 3451 9343
Telefax +82 2 3451 9399

LATVIA
Miele SIA
Kr. Valdemara 21-621
1010 RIGA
Tel. +371 6 7035232
Telefax +371 6 7035252

LUXEMBOURG
Miele s.à r.l.
20, Rue Christophe Plantin
2339 Luxembourg
Tel. +352/4 97 11-25
Telefax +352/4 97 11-39

MEXICO
Miele S.A. de C.V.
Av. Santa Fé 170
German Centre 0-4-2
Col. Lomas de Santa Fé
01210, México, D.F.
Tel. +52/55/85 03 98 70 and
+52/55/85 03 98 73
Telefax +52/55/85 03 98 74

NETHERLANDS
Miele Nederland B.V.
De Limiet 2, 4131 NR Vianen
Tel. +31(0)3 47/37 88 83
Telefax +31(0)3 47/37 84 29

NEW ZEALAND
Miele New Zealand Ltd.
Unit L, 10-20 Sylvia Park Road
Mt. Wellington, 1060 Auckland
Tel. +64(0)9/573 1269
Telefax +64(0)9/573 1268

NORWAY
Miele AS
Loxaveien 13
1351 Rud
Tel. +47/67 17 31 00
Telefax +47/67 17 31 10

POLAND
Miele Sp. z. o. o.
ul. Gotarda 9
02-683 Warszawa
Tel. +48/022/5 48 40 00
Telefax +48/022/5 48 40 10

PORTUGAL
Miele Portuguesa, Lda.
Av. do Forte, 5
2790-073 Carnaxide
Tel. +351/21/42 48-100
Telefax +351/21/42 48-109

RUSSIA
000 Miele CIS
Leningradskij Prospekt, 39A
125167 Moscow
Tel. +7(8)495 745-8992
Telefax +7(8)495 745-8680

SINGAPORE
Miele Pte. Ltd.
163 Penang Road #04-02/03
Winsland House II
Singapore 238463
Tel. +65/67 35 11 91
Telefax +65/67 35 11 61

SLOVAKIA
Miele spol. s. r. o.
Plynárenská 1
82109 Bratislava
Tel. +421/2/53 63 37 37
Telefax +421/2/53 63 37 46

SLOVENIA
Miele d.o.o.
Brnčičeva 41 g
1000 Ljubljana
Tel. +386 (0)1563 44-80
Telefax +386 (0) 1563 44-90

SOUTH AFRICA
Miele SA (Pty) Ltd.
63 Peter Place
Bryanston 2194
Tel. +27(0)11/5 48-19 00
Telefax +27(0)11/5 48-19 35

SPAIN
Miele S.A.
Carretera de Fuencarral, 20
28108 Alcobendas (Madrid)
Tel. +34/91/6 23 20 00
Telefax +34/91/6 62 02 66

SWEDEN
Miele AB
Industrivägen 20
Box 1397
171 27 Solna
Tel. +46(0)8/5 62 29-000
Telefax +46(0)8/5 62 29-209

SWITZERLAND
Miele AG
Limmatstr. 4
8957 Spreitenbach
Tel. +41(0)56/4 17 20 00
Telefax +41(0)56/4 17-24 69

TURKEY
Miele Elektrikli Aletler
Diş. Tic. ve Paz. Ltd. Şti.
Güvercin Sokak No. 10
34330 Levent-Istanbul
Tel. +90/2 12/3 25 84 40
Telefax +90/2 12/3 25 84 49

UKRAINE
Miele LLC
Spaskaya St., 30 A
04070 Kiev
Tel. +38 (8)044 4960300
Telefax +38 (8)044 4942285

UNITED ARAB EMIRATES
Miele Appliances Ltd.
Gold & Diamond Park
Sheikh Zayed Road
Building No. 6,
Offices Nos. 214-220
Dubai
Tel. +971 4 3418444
Telefax +971 4 3418852

USA
Miele, Inc.
9 Independence Way
Princeton, NJ 08540
Tel. 001-800/843 72 31
Telefax 001-609/419 42 41

OTHER COUNTRIES:
Sales International
Miele & Cie. KG
Carl-Miele-Straße 29
33332 Gütersloh
Tel. +49(0)52 41-89 15 07
Telefax +49(0)52 41-89 15 00

Please do not hesitate to contact us if
you require further information on these
machines, or on any of our other products.

The images, logos, names and trading marks used in this
brochure to identify Miele, our products and services are our
proprietary marks whether registered or unregistered. These
may only be used with the express permission of Miele.