

SMALL CAPACITY Liquitainer®/Firetainer® WATER STORAGE TANKS

Benefits

- > **Flexibility** Tanks designed to fit into restricted spaces in plant rooms or loft spaces
- > **Economy** Save costs through effective use of the available area
- > **Versatility** Site assembled kit format means:
 - Tanks are mounted direct onto a concrete floor. No need for dwarf walls or steel supports.*
 - Components are easy to transport to and around site
 - Assembly is straightforward
- > **Low maintenance & long life** Use of inherently corrosion resistant materials.

Tanks can be supplied for projects that require make-up or feed water for sprinkler, general cold water services, or drinking water supplies, in:

- Site assembled galvanised steel or aluminium with an internal liner
- One-piece or semi-sectional in GRP

Design

Steel and aluminium, membrane lined tanks use an outer steelwork of hot-dipped galvanised steel sections, with panels of either high grade pre-galvanised steel or marine-grade aluminium. Internally the tanks are lined with a tailor-made synthetic rubber liner made from either EPDM or Butyl Rubber.



Typical 13m³ steel tank lined internally. Supplying water to a residential sprinkler system.

GRP cold water storage tanks are tailor-made to specific customer dimensions, to suit a particular application and are designed to meet BS EN 13280:2001. Non-insulated or CFC free pre-insulated panels are available. Insulation is available in a range of thicknesses.



Typical one-piece and semi-sectional pre-insulated GRP tanks.

Approvals & Standards Compliance

WRAS drinking water approval for GRP sectional one-piece or semi one-piece tanks.

Compliance with BS 9251:2014. Fire sprinkler systems for domestic and residential occupancies Code of practice.

Capacities



Steel and aluminium, membrane lined tanks. Capacities from 5m³ (1,100gallons) upwards.

GRP cold water storage tanks. Capacities from 5m³ (1,100 gallons) to 97m³ (21,340 gallons).

* Foundation level tolerance: +/- 6.0mm

For more information and prices, call our sales number on: 01432 269605 or email us on: sales@franklinhodge.com Or visit our website on: www.franklinhodge.com

SMALL CAPACITY Liquitainer®/Firetainer® WATER STORAGE TANKS

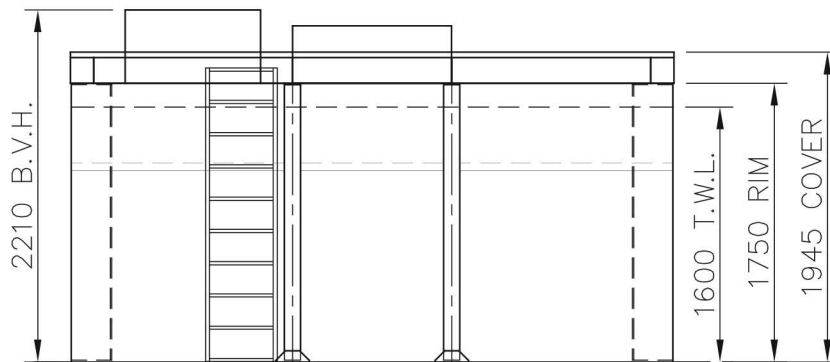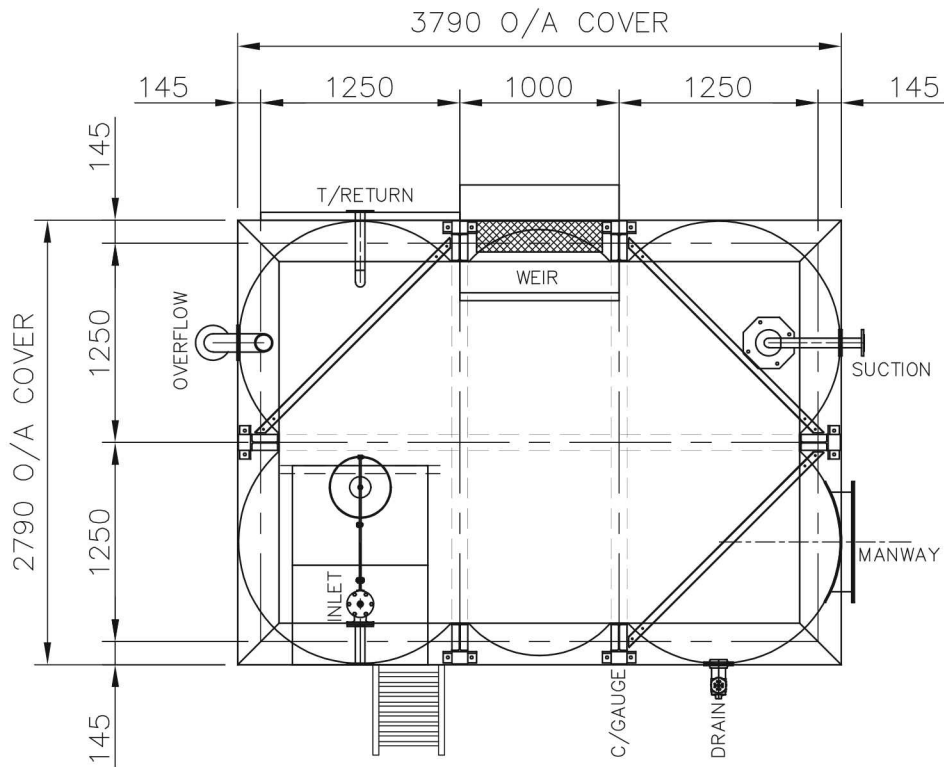

Franklin Hodge Industries Ltd
 Jubilee Building, Westfields Trading Estate
 Faraday Road, Hereford HR4 9NS
 Telephone: +44 (0) 1432 269605
 Fax: +44 (0) 1432 277454
 Web: www.franklinhodge.com