


RonaGrip Instant Nosing Glow

Pre-formed GRP glow in the dark slip resistant stair nosing

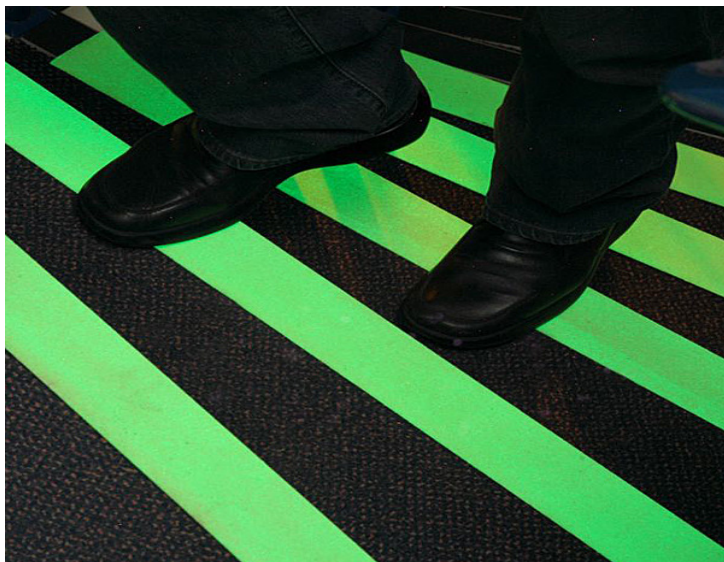

FEATURES

- highly slip resistant
- easy to apply
- can be trafficked instantly
- hard wearing and durable
- installed in virtually any environment
- corrosion resistant

Description

RonaGrip Instant Nosing Glow is a preformed fibreglass profile constructed of combining polyester resins with fibre reinforcement.

Two types of grit surface are available. Type 'I' with its smaller grit size, offers good slip resistance whilst allowing the surface that is reasonably easy to clean. Type 'E' with a much heavier grit profile is ideal for the rigors of the external environment.

RonaGrip Instant Nosing Glow has been developed as a cost effective, long term solution to the obligations under the Disability Discrimination Act Part III and in particular, the sections relevant to the partially sighted.

In order that the obligations are satisfied, in essence, all stairs accessed by members of the public should have a contrasting coloured nosing fitted to the step edges in addition, such nosings should provide a slip resistant top surface.

With its patented feathered edge, RonaGrip Instant Nosing Glow can be fitted to almost any step without creating a trip hazard. Even when fitted to landings and extra deep steps, its unique design provides the most secure solution.

Uses

- Internal and external use
- Suitable for industrial, commercial and retail use
- Emergency slip resistant solution

Instructions for Use

Preparation

Prepare the surface and ensure that it is clean and free of any loose or friable material that can effect the adhesion.

RonaGrip Instant Nosing Glow

Pre-formed GRP glow in the dark slip resistant stair nosing

Instructions for Use (continued)

Installation

Apply RonaGrip Instant Adhesive MP10 on to the back of the nosing. Carefully place the RonaGrip Instant Nosing Glow onto the edge of the stair. Once in place drill two holes on each side of the nosing on the top surface in the centre, approximately 50mm in from the side, then approximately every 400-500mm. Dependant on the substrate it may be necessary to increase or decrease this spacing.

Packaging

RonaGrip Instant Nosing Glow is available in two different sizes. The 70mm x 30mm profile would normally be used on existing structures. The 55mm x 55mm version should be used on new structures which are subject to current UK Building Regulations as applicable from May 2004.

RonaGrip Instant Nosing Glow is supplied in 4 lengths. The standard sizes are 750mm, 1000mm, 1500mm and 3020mm.

A free cutting service is available to meet project requirements. Health And Safety Non-hazardous. Protective clothing such as goggles, overalls and gloves is recommended to prevent any effect from prolonged skin contact, inhalation or ingestion of RonaGrip Instant Adhesive MP10. Refer to Health and Safety Data Sheet.

Slip Resistance

Using the pendulum test method, RonaGrip Instant Nosing Glow Type 'I' achieved a Slip Resistance Value of 85 in the dry (Extremely low risk) and 65 in the wet (low risk). RonaGrip Instant Nosing Glow Type 'E' achieved 67 in the dry (extremely low risk) and 60 in the wet (low risk).

Technical Service and Support

Ronacrete provide free technical advice and support during design and installation of all systems for flooring, concrete repair, bonding, bedding and waterproofing. If you need any further information or a full technical data sheet contact the Ronacrete Technical Department on +44 (0) 1279 638 700.

Site Attendance

When on site Ronacrete representatives are able, if asked, to give a general indication of the correct method of installing a Ronacrete product. It is important to bear in mind that Ronacrete Ltd is a manufacturer and not an application contractor and it is therefore the responsibility of the contractor and his employer to ensure he is aware of and implements the correct practices and procedures to ensure the correct installation of the product and that liability for its correct installation lies with the contractor and not with Ronacrete Ltd.

The information detailed in this leaflet is liable to modification from time to time in the light of experience and of normal product application, and before using, customers are advised to check with Ronacrete Ltd, quoting the reference number, that they possess the latest issue. Any person or company using the product without first making further enquiries as to the suitability of the product for the intended use does so at his own risk, and Ronacrete Ltd can accept no responsibility for the performance of the product, or for any loss or damage arising out of such use.