MALLET HYDRAULIC RAM PUMP

The Energy Mallet Ram Pump with Camel Ball Valves and Hydraulic Drive.

Energy Ram Pumps are;

The preferred pump in hundreds of Auto-desludging installations.

Designed with traditional engineering values in mind.

Reliable in a range of demanding applications.

Unique and virtually unblockable valving system.

Proven in a wide range of demanding slurry handling applications.

Fixed and variable flow rates available.

Highly reliable and easy to maintain.

High quality materials selected for longevity.

Personal help and advice for every enquiry.

Mechanicaly Driven version also available.

Technical Information:

Motor sizes - 3 kw to 55 kw

Pump sizes - 240mm, 270mm, 360mm, 380mm, 460mm & 480mm

pn16 Flange sizes - 100 / 150 mm

Max. Suction lift - 6 Metres

Max. Delivery head - 200 Metres

Max flow rate - 30lts/sec


Max. Solids size - 60 mm

Surge Arrestors - as required

Energy Chemical and Equipment Company Southwell Business Park, Upton Road,


Southwell, Nottinghamshire, NG25 0TX.


Phone 01636 816600 fax 01636 816602 www.energypumps.co.uk All Product Manufacturing Copyrights and Patent Rights reserved.

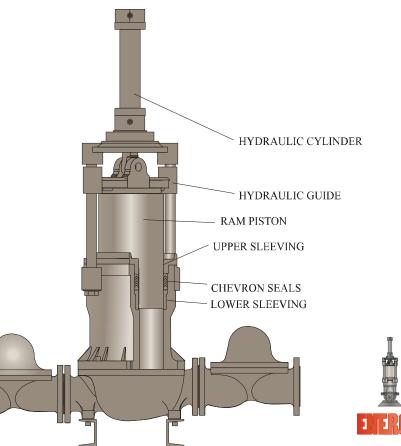

ENERGY MALLET PUMP DIMENSIONS

	Pump	Valve	Α	В	С	D	Е	F	G	Н
	240/270	Camel 100mm	310	360	360	1406	200	230	420	560
	240/270	Camel 150mm	310	360	360	1750	200	230	566	615
	360/380	Camel 150mm	500	380	600	1756	180	230	566	621
	460/480	Camel 150mm	600	500	720	1870	200	250	566	718

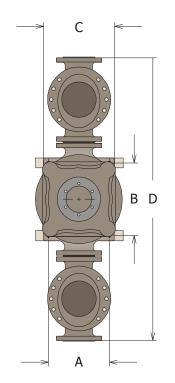

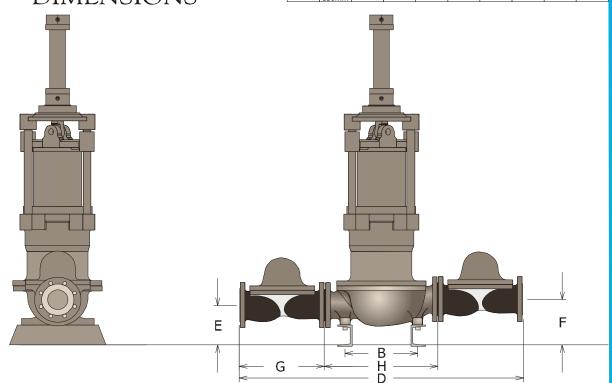

Top View

Side View

All dimensions given as a guide only

copyright and property of: ENERGY CHEMICAL & EQUIPMENT Co. SOUTHWELL, NOTTINGHAM, ENGLAND.