



*The Quality Choice*



[www.mitrewelding.co.uk](http://www.mitrewelding.co.uk)



**HQ5**  
Lightweight Heated  
Electrode Dispenser



**HIQ15**  
Insulated Quiver



**P04**  
Thermostatically  
Insulated Quiver



**S50**  
Thermostatically  
Controlled  
Drying Oven



**S50-S**  
Digitally Controlled  
Drying Oven



**S06**  
Thermostatically  
Controlled Stationary  
Oven



**SD6**  
Digitally Controlled  
Stationary Oven



**SH5-MK1**  
Digital Thermostat  
Controlled  
Drying/Baking Oven



**HT3/HT4**  
Digitally Controlled  
Baking Oven

Model	HQ5 Lightweight Heated Electrode Dispenser	HIQ15 Insulated Quiver	P04 Thermostatically Insulated Quiver
Capacity	9kg	15kg	15kg
Basket for Rods	No	Optional	Optional
Temperature	80-100°C	100-130°C	0-320°C
Set points	Fixed Temperature	Fixed Temperature	Adjustable
Thermometer	No	Optional	Optional
Voltage	110 or 240 AC (State Voltage when Ordering)	48, 110 or 240 AC (State Voltage when Ordering)	48, Dual Voltage 110/240 AC
Neon Switch	Optional	Yes	No
Temperature Light	No	Yes	Yes
Output	0,15 kW	0,15 kW	0,3 kW
Dims ext	(125 x 125 x 500mm)	(175 x 175 x 585mm)	(175 x 175 x 585mm)
Dims int	(123 x 115 x 460mm)	(120 x 110 x 460mm)	(120 x 110 x 460mm)
Weight	3kg	10kg	10kg
Dual Voltage	Optional	Optional	Yes
Calibration	No	No	Optional


Model	S50 Thermostatically Controlled Drying Oven	S50-S Digitally Controlled Drying Oven	S06 Thermostatically Controlled Stationary Oven	SD6 Digitally Controlled Stationary Oven
Capacity	50kg	50kg	136kg	136kg
Temperature	0-300°C	0-300°C	0-320°C	0-300°C
Digital Display	No	Yes	No	Yes
Set points	Adjustable	Single / Adjustable	Adjustable	Single / Adjustable
Neon Switch	Optional	No	Optional	No
Voltage	110 or 240 AC (State Voltage when Ordering)	110 or 240 AC (State Voltage when Ordering)	110 or 240 AC (State Voltage when Ordering)	110 or 240 AC (State Voltage when Ordering)
Output	0,75 kW	0,75 kW	1,5 kW	1,5 kW
Dims ext	(310 x 405 x 555mm)	(310 x 405 x 555mm)	(530 x 620 x 620mm)	(530 x 620 x 620mm)
Dims int	(250 x 250 x 460mm)	(250 x 250 x 460mm)	(465 x 465 x 480mm)	(465 x 465 x 480mm)
Weight	25kg	25kg	42kg	42kg
Calibration	Optional	Yes	Optional	Yes

Model	SH5-MK1 Digital Thermostat Controlled Drying/Baking Oven	HT3 Digitally Controlled Baking Oven	HT4 Digitally Controlled Process Baking Oven
Capacity	136kg	136kg	136kg
Temperature	0-400°C	0-500°C	0-500°C
Digital Display	Yes	Yes	Yes
Data Logger	No	No	Optional
Delay Timer	No	No	7-Day Programmable
Set points	Single / Adjustable	Single / Adjustable	Two / Adjustable
Hold Cycle	Optional	Optional	Yes
Voltage	110 or 240 AC (State Voltage when Ordering)	110 or 240 AC (State Voltage when Ordering)	110 or 240 AC (State Voltage when Ordering)
Output	2,25 kW	3 kW	3 kW
Dims ext	(530 x 620 x 620mm)	(575 x 675 x 775mm)	(575 x 675 x 775mm)
Dims int	(465 x 465 x 480mm)	(465 x 465 x 480mm)	(465 x 465 x 480mm)
Weight	42kg	77kg	77kg
Calibration	Yes	Yes	Yes





*The Quality Choice*

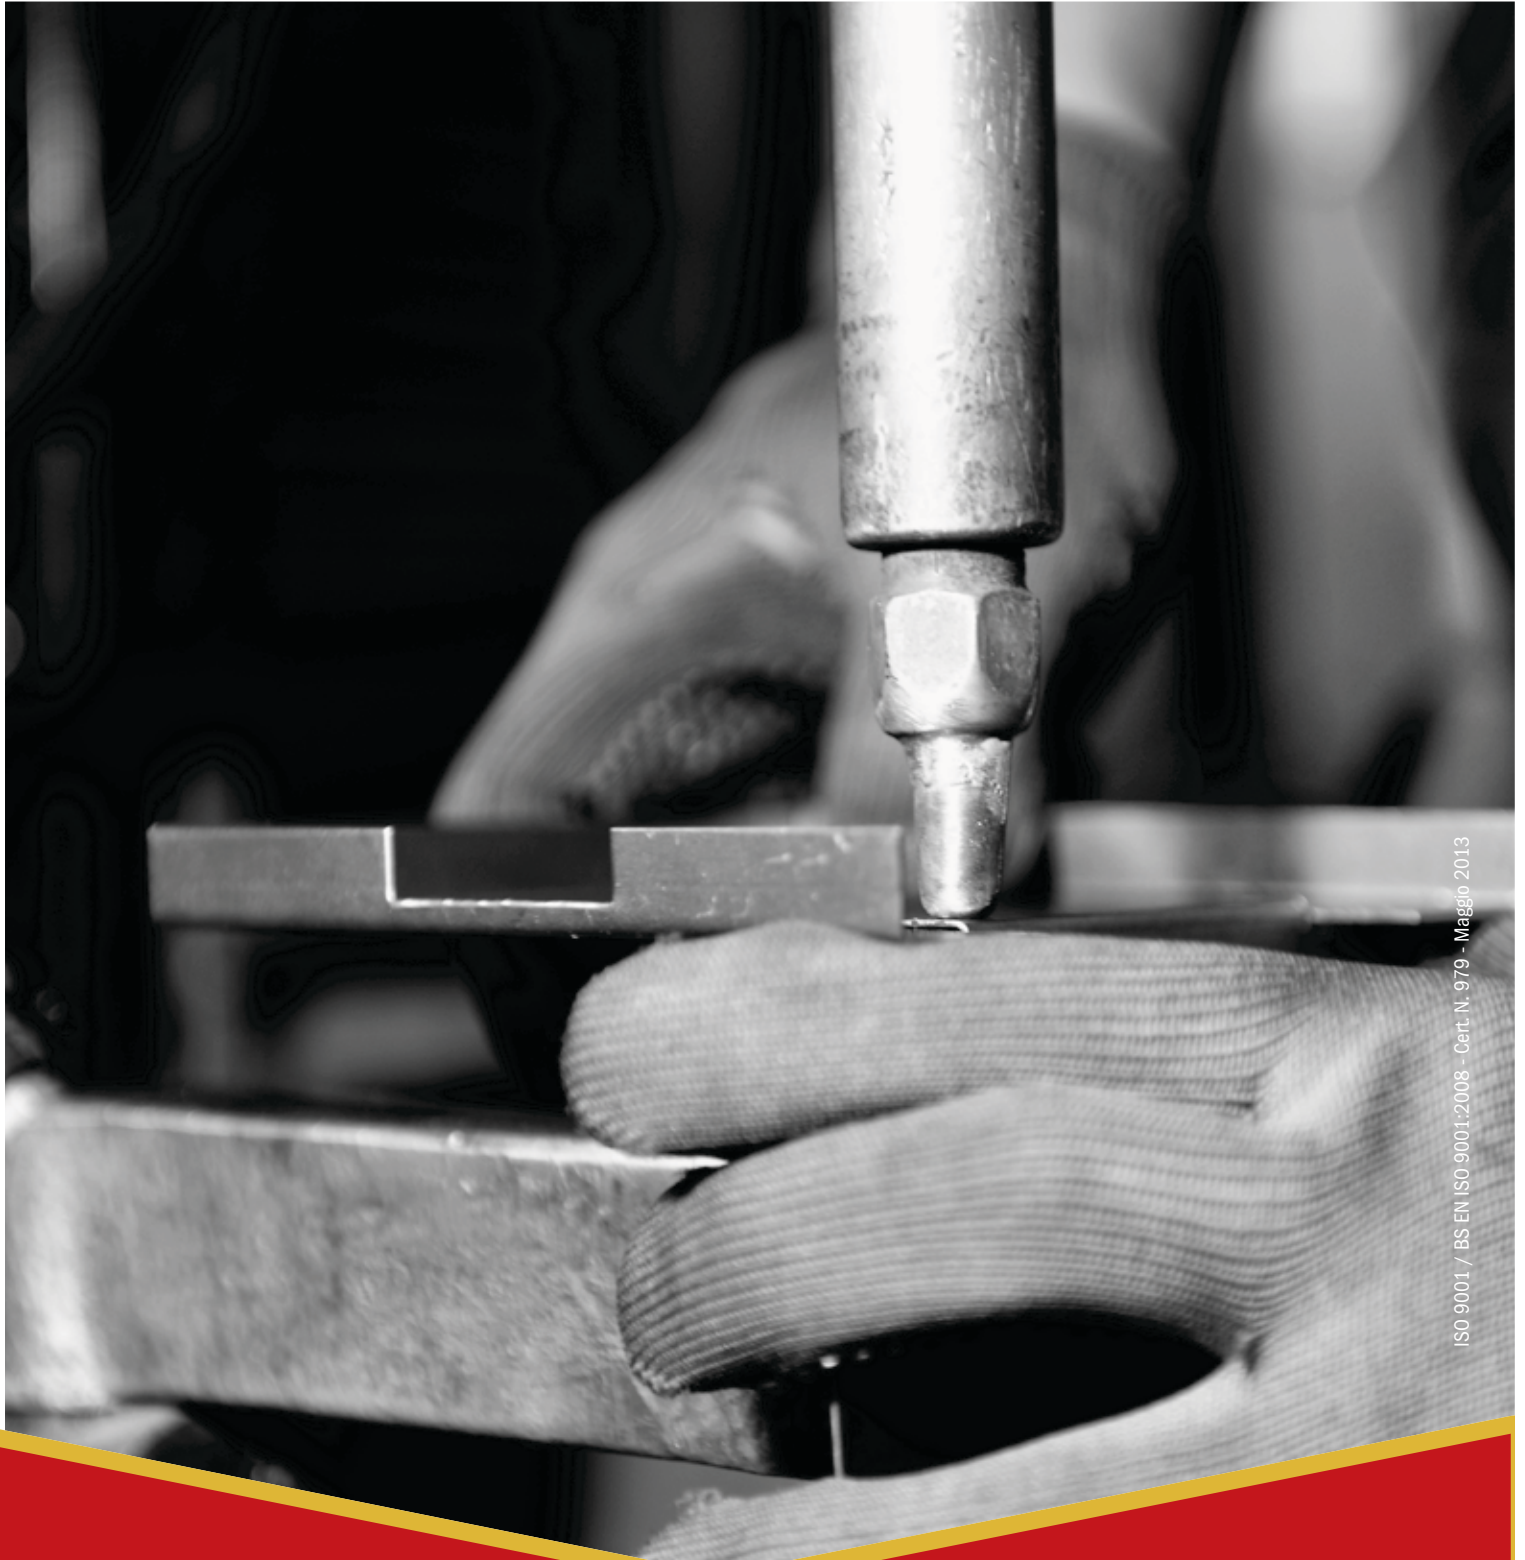

ISO 9001 / BS EN ISO 9001:2008 - Cert. N. 979 - Maggio 2013

**Mitre Welding Products Ltd.**

Unit B6, Angel Road Works  
Advent Way - Edmonton - London N18 3AH  
Phone: +44 (0) 208 803 0726  
Fax: +44 (0) 208 807 7690  
sales@mitrewelding.co.uk