



EGS-WUPP *Silver Walk-Up Package* Telephone Entry System

Standard Features for Telephone Entry

- Stand alone functionality or seamless integration with Keri's access control system and *Doors*™ software for real access control and telephone entry integration
- **PXL-500GP** installed and wired inside the housing with 65,000 cardholder capacity, 750 tenant capacity on all units
- Four line, large font per line, soft white supertwist LCD display, Lexan™ cover
- Three 80 character, programmable, scrolling pages for instructions and messages with automatic timed rotation
- Up to 6-digit directory code, up to 5-digit **Entraguard** ID codes (PINs), up to 15-digit telephone numbers
- Networkable to manage multiple doors via RS-485
- Optional wireless RS-485 communication
- Time Zone restrictions for calling tenants and for PINs
- Links a visitor to the resident who allowed entry
- Programmable talk time, tone dialing, adjustable volume
- Telephone entry units can be mixed with access control units on a single network for up to 128 controllers
- Flexible connectivity: RS-232, Modem, TCP/IP
- Stores up to 3,640 events, manages up to 255 individual sites
- Weather and vandal resistant housing
- Quick disconnect terminals, two Mylar™ speakers with superior sound
- Door forced open and door held open alarms, heavy duty door and alarm relays
- Built-in surge protection, non volatile memory
- Powerful *Doors*™ Access Control Software with full access control features: time zones, temporary users, online programming, operator security levels, multiple site management and automatic configuration



The **EGS-WUPP** includes an **MS-3000** proximity reader

Keri's **Silver Walk-Up Package** addresses the basic telephone entry application, namely *visitor* and *resident* control for the main entrance to a building. The connections are already made inside the box. The installer needs only to mount the unit, connect a phone line, the power supply, the connection to the door strike, and then decide how unit programming will be done. Once connected to the PC (either directly, via modem, or via TCP/IP) simply run Auto-Configuration. A **PXL-500GP** comes already installed and wired inside the housing. Cards are enrolled bulk or one-at-a-time by presenting them to the reader. A second door may be controlled simply by plugging an **SB-593** to the **PXL-500GP** and connecting a second reader. A *Wiegand* version is also available (**EGS-WUPW** with a **P-300** proximity reader).

The **Entraguard Silver** is the mid size offering in Keri's telephone entry product line. With a large-font, 4-line, scrolling display, the **Silver** has a 750 tenant capacity, enough to handle most projects. Designed for looks and durability, it comes in an attractive, weather resistant, 14-gauge, brushed stainless steel enclosure. The **Silver** is available at a price well below competitive medium-capacity systems. A No-Phone-Line option is available. Each **Entraguard Silver** has two extra relay outputs that can be used in a variety of ways including turning on a lobby light, unlocking more than one interior entrance, etc. This can be initiated by tone commands from the tenant's location or be based on an access granted decision. An on-board modem is also included for remote programming.

Entraguard™

EGS-WUPP Silver Walk-Up Package



2305 Bering Drive • San Jose, California • 95131
408-435-8400 • Toll Free: 800-260-5265 • Fax: 408-577-1792


e-mail: sales@kerisys.com • web: www.kerisys.com

EGS-WUPP *Silver* Walk-Up Package

Telephone Entry System

Access Control Features

- Real, integrated access control with **PXL-500 P or W** controllers - the **Silver** becomes part of a Keri access control network
- Simple, one button auto-configuration
- 32 time zones, 3 holiday schedules
- Unlimited access control groups
- Expandable to 255 doors, 65,000 cardholders
- Automatically expiring **Entraguard** IDs (PINs) and cards
- Time Zones on **Entraguard** IDs (PINs) and cards, as well as doors and gates
- Full reporting of events
- Optional TCP/IP connectivity
- Direct door operation from PC
- Automatic lock and unlock of doors and gates
- Assignable inputs and outputs
- Rollcall/track, muster
- Image capture and optional badge printing
- Remote online management of multiple sites
- System operator security levels with configurable privileges

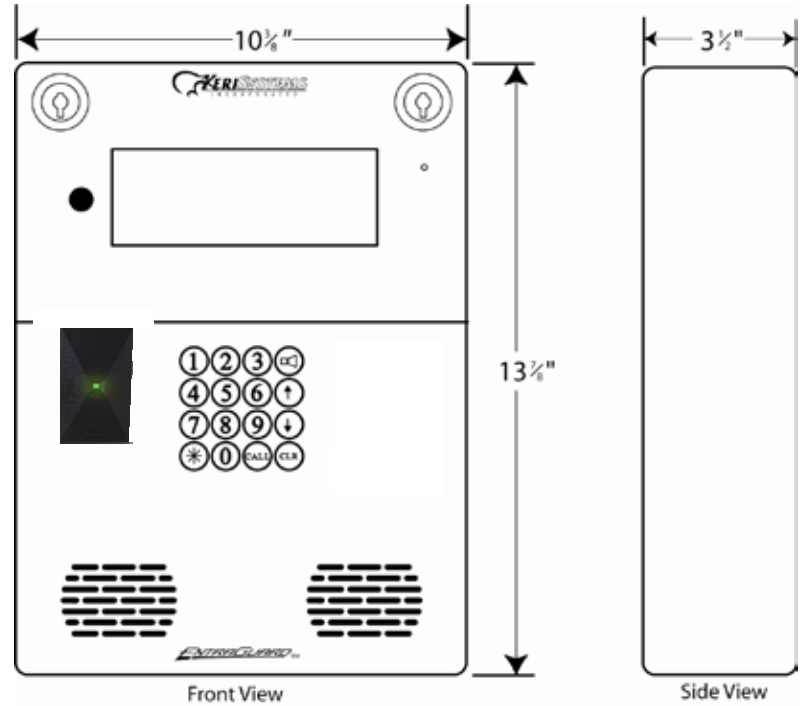

Also available as an **EGS-WUPW** with a P-300 proximity reader

Special Telephone Entry Features

- Do not Disturb Call Feature - programmable for individual tenants
- Do not Display Name Feature - programmable on a per tenant basis
- Remote online management of multiple sites
- Ability to link visitors to the residents who allowed them entry
- Ability to update several units in one pass

When using *Entraguard* products in a dial-up application, Keri requires the use of an approved modem. Please refer to the Recommended Peripherals list on the web site or contact Keri customer service.

General Features:

- Surface or recess mount
- Weather and vandal resistant housing
- Non-volatile memory
- Built-in surge protection plus surge protection kit
- Programmable talk time
- Tone dialing
- Heavy-duty alarm and output relays
- Adjustable volume control
- Maintenance free LED lighting
- Two Mylar™ speakers with superior sound
- Quick disconnect terminals

Specifications*:

- Capacity: Up to 750 Tenants
- Outputs: Door Relay, Alarm Relay, 2 additional programmable relays
- Operating Temperature: +5° to 140° F (-15° to 60° C) with heater: -20° to 140° F (-29° to 60° C)
- Input Power: 12 VDC @ 1 A
- Current Draw: 750 mA (**Silver** unit) Up to 250 mA for **PXL** controller
- Relay Contact Rating: 1 A @ 24 VDC
- Size: 13.88" H x 10.34" W x 3.5" D (35.3 cm x 26.3 cm x 8.9 cm)
- Weight: 12.30 lbs (6.09 kg)
- Material: 14 gauge stainless steel
- Warranty: 2 years
- Finish: Brushed Stainless Steel

Options / Accessories:

- Camera
- Handset
- Hooded Enclosure / Pedestal Mount
- Recessed Wall Mount Kit
- Heater (for operation below 5° F/-15° C)
- No Phone Line System

* Specifications subject to change without notice.

All trademarks are the property of their respective owners.



Presented By:

P/N: 01503-001