




## Dri-zone Quick Drying Eco Hand Dryer

Adjustable Low Noise Level – Quick Hand Drying – Slim Easy Clean Profile

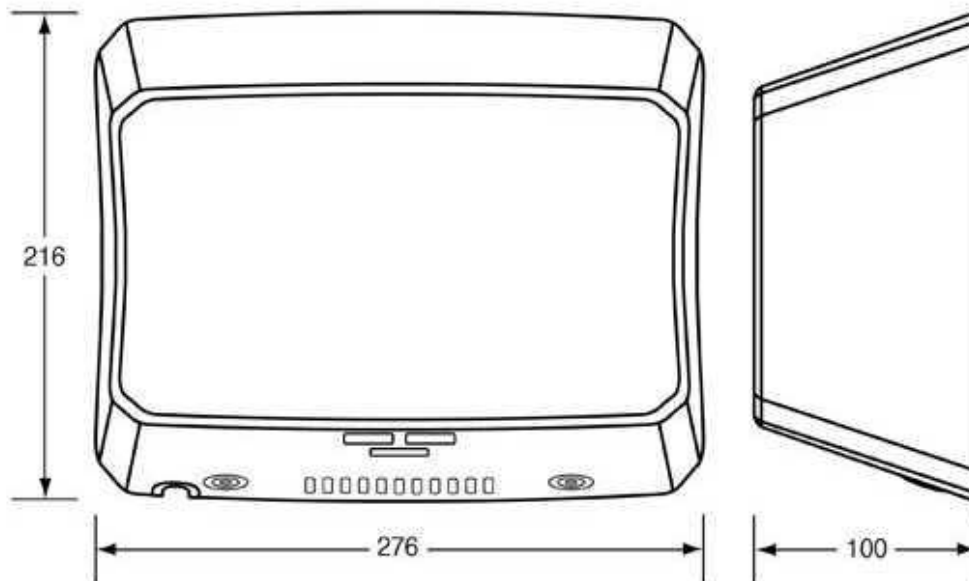

This hand dryer is ADA Compliant for disabled use having compact dimensions (In mm) of: 276w x 216ht x 100d, a Light Net Weight of 3.4 kg and comes with sloping sides top and base for a high-level self-harm protection.

The ergonomic vandal resistant cover is available in either Mild Steel with a White Epoxy Finish, or Stainless Steel (304) 1.2mm thick with a Bright Finish.

A Blue L.E.D light which provides a visible indication of the drying zone ensuring that the users hand's are always positioned in the warm air stream.

Featuring a low noise level of only 72.8 dB at 1 metre, and with an on/off heater switch this is truly a 4-amp machine. An Operation Power of only 1kw with the 0.5kw heater switched on, and a Standby Power Usage of less than 0.5w, makes this hand dryer very economic to run.

### TECHNIFLOW HAND DRIERS LTD

Techniflow House, 6a Uddens Trading Estate, Stapehill, Wimborne, Dorset, BH21 7LQ  
Tel: 01202 870770 - Email: [techniflow@btinternet.com](mailto:techniflow@btinternet.com)

# TECHNIFLOW

TECHNICAL SPECIFICATIONS	
<b>Size</b>	276w x 216ht x 100d (Sizes in mm)
<b>Weight</b>	Nett Weight 3.4 kg
<b>Cover Option</b>	Mild Steel with a White Epoxy Finish
<b>Cover Option</b>	Stainless Steel (304 Grade) 1.2mm thick with a Bright Finish
<b>Cover Security</b>	2off SS theft resistant hex drive screws (hex key supplied)
<b>Drying Time</b>	13 to 15 seconds
<b>Drying Nozzle</b>	Patented parallel dual air outlets for a wide dispersal of air
<b>Activation</b>	Automatic (infra-red), 60-second safety shut-off
<b>Comfort</b>	Blue L.E.D light which provides a visible indication of the drying zone for maximum drying efficiency
<b>Circuit Operation</b>	Infrared Automatic, self adjusting
<b>Timing protection</b>	60 seconds auto shut off
<b>Sound Level</b>	72.8 dB at 1 metre
<b>Air Speed</b>	Adjustable Output of 35 - 70 m/s [79 - 158 mph]
<b>Electrical Isolation</b>	CLASS 1
<b>Drip proof</b>	IP23
<b>Sensor Range</b>	Self adjust
<b>Operating Voltage</b>	110-120V, 50/60Hz, 0.84-1.0kW; 220-240Vac, 50/60Hz, 0.84-1.0kW
<b>Air Flow</b>	1.523 Cubic Foot Per Minute
<b>Fan</b>	Completely enclosed, vandal resistant
<b>Motor Type</b>	Adjustable speed 11/16HP, 250 - 500W, 16000 - 29000 R.P.M, Brush Type: Dual Ball Bearings
<b>Motor Thermal Protection</b>	Auto-resetting Thermostat turns unit off at 105 degree C
<b>Air Output Temperature</b>	55 degree C, (Ambient Temp. 25 degree C)
<b>Heater Element</b>	500W
<b>Heater Thermal Protection</b>	Auto Resetting Thermostat turns unit off at 85 degree C
<b>Certification</b>	ADA / CE / WEEE / TUV
<b>Suitability</b>	Commercial and Industrial Facilities, Residential Facilities, Educational Facilities, Health Centres, Aged Facilities Care Homes, Learning Disability Centres, Research Facilities, Public Toilets, Disabled Toilets, Hospitality and Leisure Centres
<b>Guarantee</b>	2 years Manufacturers Warranty



## TECHNIFLOW HAND DRIERS LTD

Techniflow House, 6a Uddens Trading Estate, Stapehill, Wimborne, Dorset, BH21 7LQ  
Tel: 01202 870770 - Email: [techniflow@btinternet.com](mailto:techniflow@btinternet.com)