

HYBRIDLOCK

FIXED LENGTH SEAL WITH INCREASED PRINTING SPACE

HybridLock has a flat tag attached to its locking head. It is made from polypropylene and is specially designed for sealing vehicle and containers used for product distribution.

Industry



Material Polypropylene (PP)

Format Mat of 10s

Tensile Strength > 15kg-f/33lbs-f


Temperature -20 to 60°C/ -4 to 140°F

Features

- Patented double locking mechanism
- Flat tag for additional printing surface
- Fixed loop design
- Pre-determined break point on the seal

Benefits

- Allows movements of the door locking mechanism without straining the seal
- Flexibility of having logo or barcode printed on tag instead of strap band
- Enhanced level of security
- User friendly, easy removal

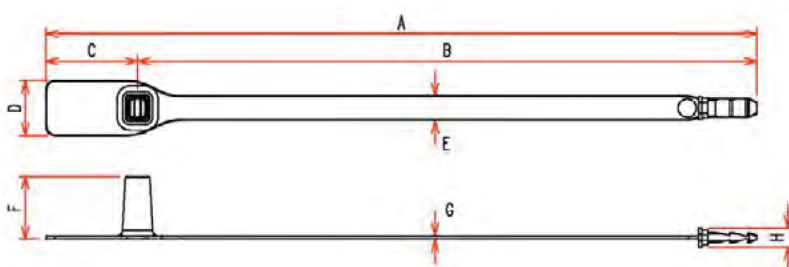

Product Dimension

Type	Product Code	Print	A	B	C	D	E	F	G	H	Removal
			mm [inch]	mm [inch]	mm [inch]	mm [inch]	mm [inch]	mm [inch]	mm [inch]	mm [inch]	
HybridLock	HL20HB	Name, Serial number	232.5 [9.15]	202.5 [7.79]	30 [1.18]	18 [0.71]	8 [0.31]	20.6 [0.81]	1.2 [0.05]	6.2 [0.24]	Hand