


300_

Open your space

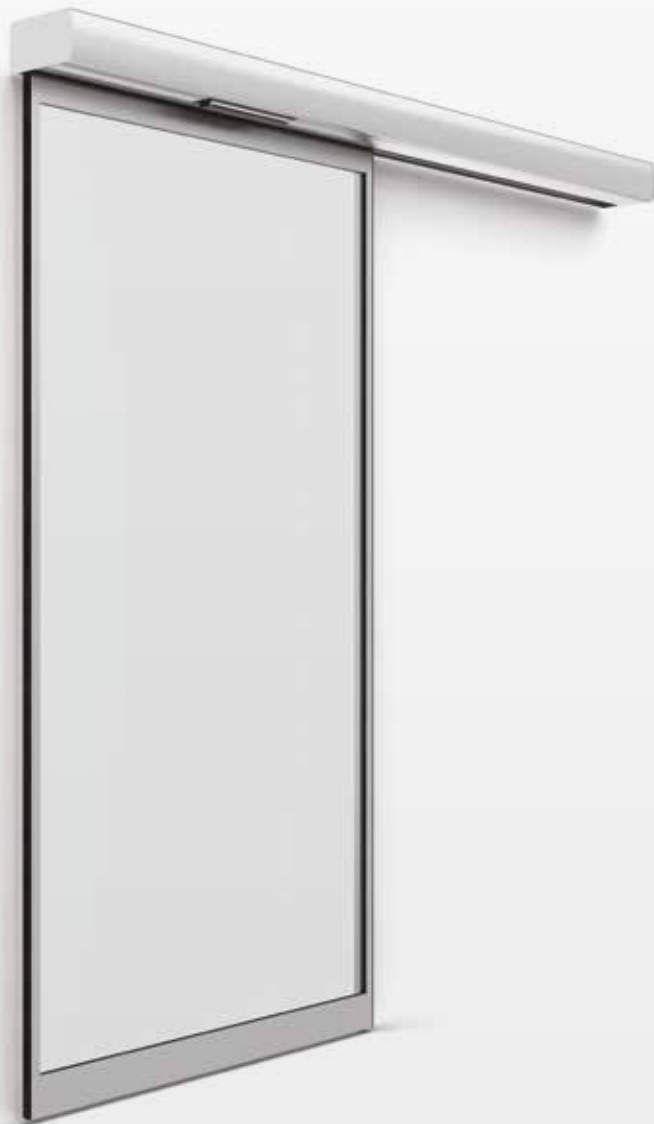


doorson | *axis*

300_



Highly efficient and attractively designed automatic sliding doors product line 300 for exterior and interior. They provide a variety of architectural possibilities when you design an office, hotel, restaurant, hospital or any other place. The only limit is your imagination. Product line 300 with its modern 10 cm drive integrates into every building and satisfies even the most demanding users. Stylish, efficient and easy to use.

The built-in sensor ensures a comfortable and safe opening-closing. The door is operated by our innovative drive controller with our very own door switches that offer various functions. Since our automatic sliding doors consume less than 0.5 W of electricity when they are in sleep mode, you don't only cut your costs, but you also contribute to a cleaner environment by using our energy-saving doors. Product line 300 raises the level of security and enables a safe and easy emergency exit for everyone.



70%
saving energy
and reducing CO²



10 cm
drive height

built-in
sensor
for pedestrian safety

< 0.5 W
power consumption



Provide a comfortable, safe and secure access for everybody.



The easiest way to control your door from everywhere and always.



Warnings and errors description.



Doors are connected to the cloud. Solve your problem remotely.



Door controller is CAN connected with sensors, switches and smart devices.



Advanced security becomes possible with advanced technology. Your safety is our highest priority.



Safe evacuation in case of an emergency.

300 thales | frameless sliding door

Virtually invisible

Technical features:

1 leaf: clear opening width 80 - 200 cm
2 leaves: clear opening width 80 - 300 cm
max. clear opening height 300 cm



300 | standard sliding door

The universal choice

Technical features:

1 leaf: clear opening width 80 - 200 cm
2 leaves: clear opening width 80 - 300 cm
max. clear opening height 300 cm




300 T | telescopic sliding door

Open wider

Technical features:

One sided: clear opening width 90 - 300 cm
Two sided: clear opening width 160 - 350 cm
max. clear opening height 300 cm

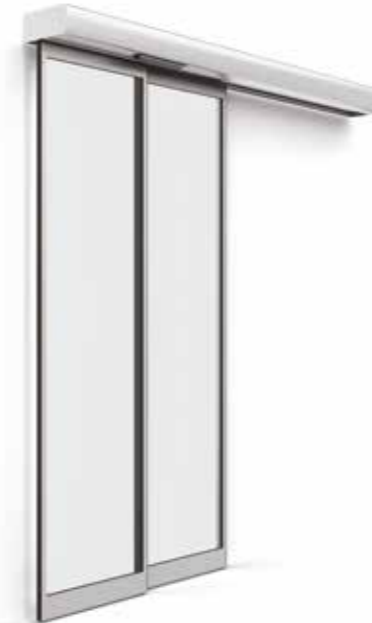

300 A | break-out sliding door

Safe open

Technical features:

1 leaf: clear opening width 90 - 125 cm
2 leaves: clear opening width 90 - 220 cm
max. clear opening height 300 cm



300 P | prismatic sliding door

Inspiration on the corner

Technical features:

2 leaves: clear opening width 80 - 300 cm
max. clear opening height 300 cm



300 C | curved sliding door

First impression


Technical features:

Radius min. r = 100 cm, max. r = adaptable
max. clear opening height 250 cm



Customize your door

Make it right, make it simple

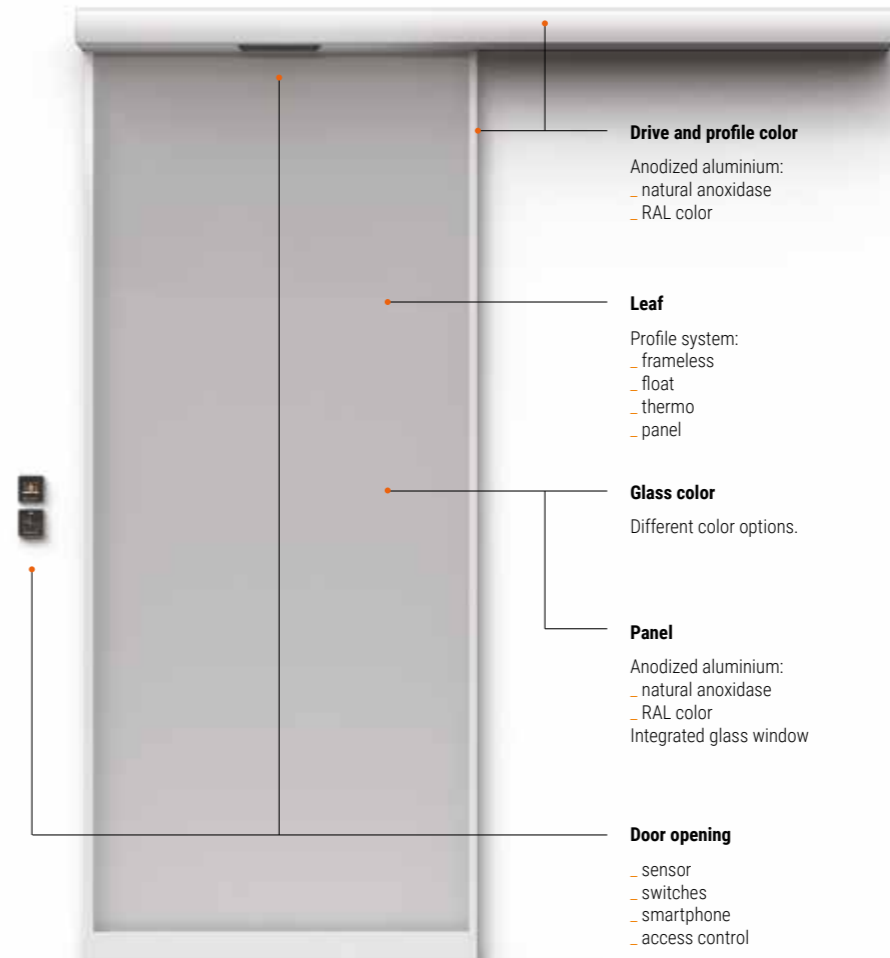

Technical data | 300 product line

USE	interior/exterior
DRIVE	height 100 mm
OPENING - CLOSING SPEED	0.3 - 0.7 m/s (adjustable)
OPENING TIME	0 - 15 s (adjustable)
POWER CONSUMPTION	max 300 W/230 V; < 0.5W power consumption in sleeping mode
LEAF	float, thermo, panel
INSTALLATION	wall installation, between the wall, under the ceiling, with top screen
PROFILE COLOR	anodized aluminium: natural anoxidase, RAL color
GLASS COLOR	different color options
DOOR OPENING	sensor, door switches, smartphone, access control
FUNCTIONALITY	a variety of adjustable functions and parameters; switching between different door regimes: OPEN, LOCK, STOP, AUTO-SUMMER, AUTO-WINTER, ONE WAY-SUMMER, ONE WAY-WINTER; warning diagnosis by COM20
ENERGY SAVING:	YES
STANDARDS:	EN 16005, EN 16361



