

# COAT HOOKS



**CLOAKROOM**  
SOLUTIONS



H12-50 | KB1




H12-25



H12-25X

## HOOK I WITH PIN



### H12-25


Wall hook with continuous pin and concealed M4 threaded sleeve. Ø 12mm, length 25mm. Solid stainless steel, hand-ground to a silky matt finish.

Also available as:


**H12-35** – Long 35 mm.

**H12-50** – Long 50 mm.



H12-35 Side view:



H12-50 Side view:



Wall mounting with M4 threaded sleeve and rosette:

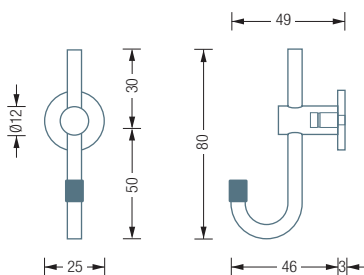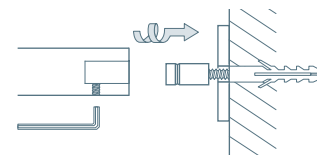

### H12-25X

Wall hook with continuous, curved coat hook. Including black protective cap\*, rosette R25 and concealed M4 threaded sleeve. Ø 12mm, length 25mm. Solid stainless steel, hand-ground to a silky matt finish. Suitable for coat rail HLX see p. 109.

Can be combined with additional rosettes see p. 93 ff. for higher loads

Mounting also screwed on the back and possible on glass - please specify when ordering

Including mounting material for wall fixing

For alternative attachments such as bonding, see p. 96 f. and p. 298 f.





H18-50D MIT ROSETTE R40

Can be combined with additional rosettes see p. 93 ff. for higher loads

Including mounting material for wall fixing

Mounting is also possible with screws on the back and on glass - please specify when ordering

For alternative fastenings such as bonding, see p. 96 f. and p. 298 f.




## DOUBLE HOOK I WITH PINS

### H18-50


Wall hook with continuous pin and concealed countersunk socket for 6 mm countersunk screw. Ø 18 mm, length 50 mm. Solid stainless steel, hand-ground to a silky matt finish.

Also available as:


### H18-80 – Long 80 mm.

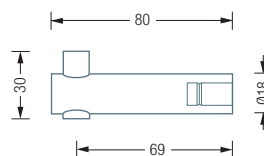


Wall mounting with countersunk sleeve and rosette:

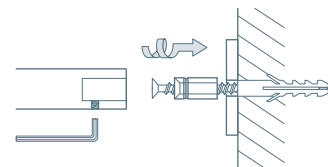

H18-50D Front view:



H18-50D Side view:



### H18-50D

Double wall hook with continuous pins and concealed countersunk sleeve for 6 mm countersunk screw.

Ø 18mm, length 50mm. Solid stainless steel, hand-ground to a silky matt finish.

Mounting is also possible hanging through cabinet floors (with M6 countersunk screw)  
 – or with UV bonding on the underside of the glass shelf (with glass screw)  
 – please specify when ordering



H20-55 MIT HUTROSETTE R40H | KB1




H20-100



H20-100TS MIT HUTROSETTE R40H

## HOOK | WITH PIN



### H20-55

Wall hook with continuous pin and partially concealed hat rosette R25H for 6 mm countersunk screw. Ø 20 mm, length 58 mm. Solid stainless steel, hand-ground to a silky matt finish.


Also available as:

**H20-80** – Long 83 mm.


**H20-100** – Long 103 mm.

**H20-140** – Long 143 mm, for 6 mm hexagon screw


H20-80 Side view:

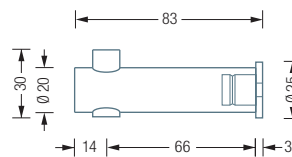



H20-140 Side view:

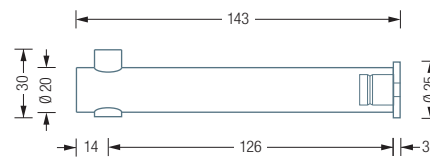

H20-100 Side view:

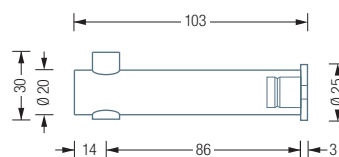


Wall mounting with hat rosette:

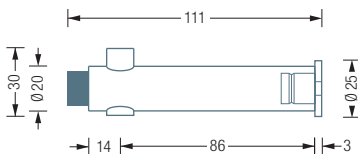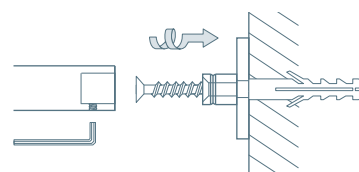

### H20-100TS

Wall hook with continuous pin and doorstep TS\*. With partially concealed hat rosette R25H for 6 mm countersunk screw. Ø 20 mm, length 111 mm. Solid stainless steel, hand-ground to a silky matt finish.



### TS

Optional doorstep\* for wall hooks.

Kleiderbügel siehe S. 80

For higher loads, we recommend using the hat rosette R40H see p. 93

Including mounting material

For alternative attachments such as bonding, see p. 96 f. and p. 298 f.

\* Material: NBR synthetic rubber (Nitrile Butadiene Rubber). High elasticity and durability with favorable aging behavior and low abrasion.



HV18-80




HV14-30 | KB1

Can be combined with additional rosettes see p. 93 ff. for higher loads

Including mounting material for wall fixings


Mounting is also possible with screws on the back and on glass – please specify when ordering

For alternative attachments such as bonding, see p. 96 f. and p. 298 f.



#### HV10-20



Wall hook with concave milling. Mounting with M4 hanger bolt. Ø 10mm, length 20mm. Solid stainless steel, hand-ground to a silky matt finish.



#### HV14-30

Wall hook with concave milling and concealed M4 threaded sleeve, Ø 14 mm, length 30 mm. Solid stainless steel, hand-ground to a silky matt finish.

Wall mounting with M4 threaded sleeve and rosette:

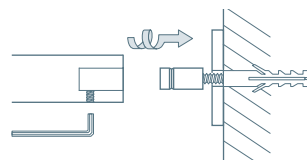


#### HV16-50

Wall hook with concave milling and concealed countersunk sleeve for 6 mm countersunk screw, Ø 16 mm, length 50 mm. Solid stainless steel, hand-ground to a silky matt finish.

Also available as:

**HV18-80** – Ø18 mm, Long 80 mm.

Wall mounting with countersunk sleeve and rosette:

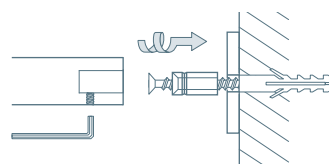




HKN16-67 | KB1

HF14-50 WITH  
ADHESIVE PLATE KT40-6 | KB1

## HOOK | CONICAL GROOVE




### HKN16-32


Wall hook with conical groove, Ø 16 mm, Length 32mm. Mounting with M6 hanger bolt. Solid stainless steel, hand-ground to a silky matt finish.

Also available as:

### HKN16-67 – Long 67 mm.

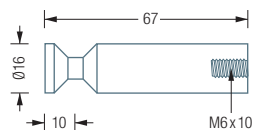

## HOOK | FLOW




### HF14-50

Wall hook Flow with flowing groove, Ø 14 mm, length 50 mm. Mounting with M6 hanger bolt. Solid stainless steel, hand-ground to a silky matt finish.

Also available as:

### HF16-65 – Long 65 mm.



Ideal for hangers KB1 or KB1H see page 80


Can be combined with additional rosettes see p. 93 ff. for higher loads

The HKN16-67 hook is also part of the Helix 10 coat rack on page 10


Including mounting material for wall fixing

For alternative attachments such as bonding, see p. 96 f. and p. 298 f.

Magnet attachment with pot magnet and threaded pin, adhesive force approx. 38 kg. Please specify when ordering.

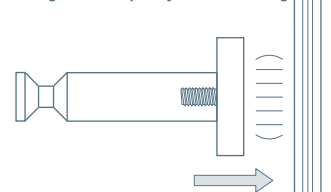

Bonding with adhesive adapter for M4/ M6 threads - suitable for all smooth surfaces such as glass and ceramics. Please specify when ordering.

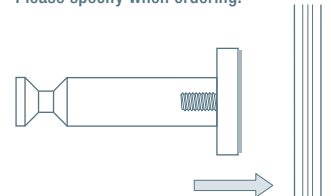



HA1-S



HA1-E



HA1-RE | KB1


Can be combined with additional rosettes see p. 93 ff. for higher loads

Including mounting material for wall fixing


Installation also possible with screws on the back and on glass - please specify when ordering

For theft-proof installation, we recommend screw locking with Loctite® or a comparable product

For alternative attachments such as bonding, see p. 96 f. and p. 298 f.



nie wieder bohren.




### HA1-S

Bar-shaped wall hook, Ø 12 mm, length 37 mm. Solid stainless steel, hand-ground to a silky matt finish. Mounting with M6 hanger bolt.

Also available as:

**HA1-RS** – Long 40 mm, with Rosette R20.





### HA1-E


Rod-shaped wall hook with a thicker head, Ø 12 mm, length 42 mm. Solid stainless steel, hand-ground to a silky matt finish. Mounting with M6 hanger bolt.

Also available as:


**HA1-RE** – Long 45 mm, with Rosette R20.



Mounting on wall:

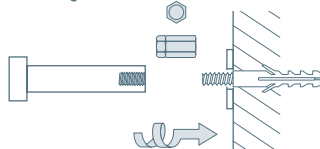

Mounting on panel:

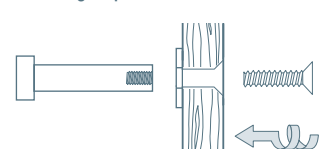



HA2-R55S | KB1



HA2-WS



HA2-RS

## HOOK | ROD FORM


Can be combined with additional rosettes see p. 93 ff. for higher loads

Including mounting material for wall fixing

Installation also possible with screws on the back and on glass - please specify when ordering

Alternative attachments such as gluing see p. 96 f. and p. 298 f.

For theft-proof installation, we recommend screw locking with Loctite® or a comparable product




### HA2-RS



Bar-shaped wall hook with rosette R20, Ø 12 mm, length 60 mm. Solid stainless steel, hand-ground to a silky matt finish. Mounting with M6 hanger bolt.

Also available as:

### HA2-R40S – with Rosette R40.



### HA2-R55S – with Rosette R55.




### HA1-WS


Bar-shaped wall hook with socket base, Ø 12 mm, Length 52mm. Solid stainless steel, hand-ground to a silky matt finish. Mounting with M6 hanger bolt.

Also available as:

### HA2-WS – Long 72 mm.

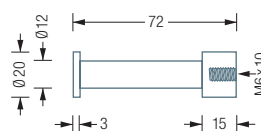

Mounting with magnet:

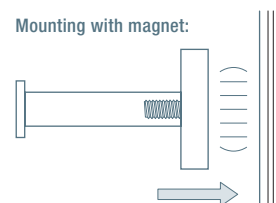

Wall hook variant H12-54 in combination with pot magnet (nickel-plated) with threaded pin, adhesive force approx. 38 kg – please specify when ordering





HA1-R40S40 | KB1



HA3-R40S55

Also available with double, concealed screw connection, see page 93


Including mounting material

Installation also possible with screws on the back and on glass - please specify when ordering

For theft-proof installation, we recommend screw locking with Loctite® or a comparable product

For alternative attachments such as bonding, see p. 96 f. and p. 298 f.

## HOOK | BIG HEAD



### HA1-R40S40

Bar-shaped wall hook  $\varnothing$  12 mm with large head  $\varnothing$  40 mm and rosette R40, length 43 mm. Solid stainless steel, hand-ground to a silky matt finish. Mounting with M6 hanger bolt..


Also available as:

**HA1-R55S40** –  $\varnothing$  12 mm, Head  $\varnothing$  40 mm, Long 43 mm, with Rosette R55.


**HA3-R40S55** –  $\varnothing$  20 mm, Head  $\varnothing$  55 mm, Long 49 mm, with Rosette R40.

**HA3-R55S55** –  $\varnothing$  20 mm, Head  $\varnothing$  55 mm, Long 49 mm, with Rosette R55.


HA1-R55S40 Side view:




HA3-R40S55 Side view:



HA3-R55S55 Side view:



Wall mounting with rosette:

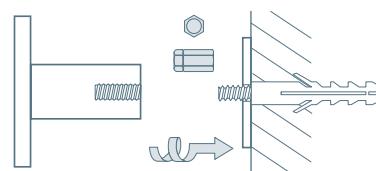



HN20-70 | KB1




HN16-30



HN20-40

## HOOK | ROUNDED GROOVE



### HN16-30


Bar-shaped wall hook with circumferential groove,  $\varnothing$  16 mm, Length 30mm. Solid stainless steel, hand-ground to a silky matt finish. Mounting with M6 hanger bolt.

Also available as:


**HN20-40** –  $\varnothing$  20 mm, Long 40 mm.

**HN20-70** –  $\varnothing$  20 mm, Long 70 mm.


HN20-40 Side view:



HN20-70 Side view:

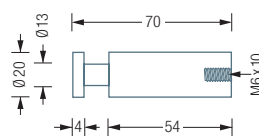


Wall mounting with rosette:

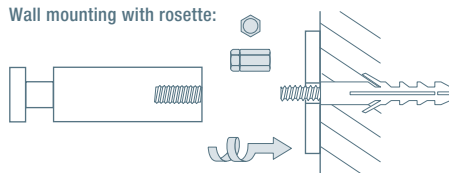

Wall hook HN20-70 with Rosette R40, with concealed M6 internal thread

Magnetic attachment:

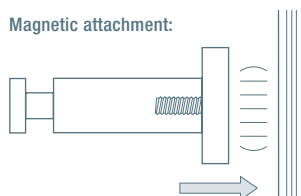

Wall hook HN20-70 in combination with pot magnet (nickel-plated) with threaded pin, adhesive force approx. 38 kg - please specify when ordering

Can be combined with additional rosettes see p. 93 ff. for higher loads

Including mounting material

Installation also possible with screws on the back and on glass - please specify when ordering

For alternative attachments such as bonding, see p. 96 f. and p. 298 f.

Recommend for theft-proof installation we lock the screws with Loctite® or a comparable product

Stainless steel cleaner see p. 292




HG8-30



HG18-50D WITH ROSETTE R40

## HOOK I WITH O-RING\*



### HG8-16

Hook with O-ring\*, Ø 8 mm, length 16 mm. assembly using M4 hanger bolt. Solid stainless steel, hand-ground to a silky matt finish.

Also available as:


**HG8-30** – Ø 8 mm, Long 30 mm.

**HG12-30** – Ø 12 mm, Long 30 mm.


**HG12-40** – Ø 12 mm, Long 40 mm.

**HG15-30** – Ø 15 mm, Long 30 mm.


HG8-30 Side view:




HG12-30 Side view:




HG12-40 Side view:



HG15-30 Side view:




HG18-50D Front view:



### HG18-50D

Double hook with two O-rings\*, Ø v18mm, length 50mm. Solid stainless steel, hand-ground to a silky matt finish.


HG18-50D Side view:




Mounting is also possible hanging through cupboard shelves (with M6 countersunk screw) - or with UV bonding on the underside of the glass shelf (with glass screw) – please specify when ordering

Can be combined with additional rosettes, see p. 93 ff

HG18-50D Wall mounting:

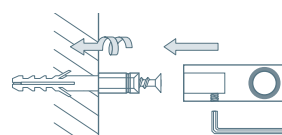

HG18-50D Cabinet base assembly:

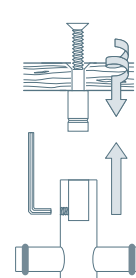

Can be combined with additional rosettes see p. 93 ff. for higher loads

Mounting material included – Installation also possible with screws on the back and on glass - please specify when ordering

For alternative attachments such as bonding, see p. 96 f. and p. 298 f.

For theft-proof installation, we recommend screw locking with Loctite® or a comparable product



DISCS R18 | R20 | R25 | R40 | R55



HAT ROSETTE R25H | R40H


Can be combined with hooks / holders to increase the surface area

Mounting material for wall screwing included with hooks / holders

For alternative attachments such as bonding, see p. 96 f. and p. 298 f.

## ROSETTE SINGLE POINT FIXING

R18 Side view:



R18 Top view:



### R18 – DISCS

Rosette, outer  $\varnothing$  18 mm, height 3 mm. With a screw point. Matching inner  $\varnothing$  for M4, M5 and M6 screws available. Solid stainless steel, finely turned.

Also available as:


**R20** - Outside  $\varnothing$  20mm

**R25** - Outside  $\varnothing$  25mm


**R40** - Outside  $\varnothing$  40mm

**R55** - Outside  $\varnothing$  55mm


R40 Side view:



R40 Top view:



R25H Side view:



R25H Top view:




### R25H – HAT ROSETTE

Hat rosette, outer  $\varnothing$  25 mm, with a screwing point for 6 mm countersunk screws. Solid stainless steel, finely turned.


Also available as:

**R40H** – Outside  $\varnothing$  40 mm.

R40H Side view:



R40H Top view:





R55V | H18-50D



R40V | R55V | R70VN

Can be combined with hooks / holders to increase the surface area


Mounting material for wall screwing included with hooks / holders

Hook H18-50D see page 84


For alternative attachments such as bonding, see p. 96 f. and p. 298 f.

## ROSETTE | DOUBLE FIXING

R40V Mounting element:



R40V Concealment:




### R40V – WITH COVER

Rosette for concealed double screwing, with surrounding cover. Outer  $\varnothing$  40 mm, drilling distance 23 mm, total height 6 mm. For 6 mm countersunk screws. Solid stainless steel, finely turned.


Also available as:

**R55V** – Outside  $\varnothing$  55 mm, drilling centres 36 mm.


R40V Side view:



R55VN Mounting element:



R55VN Concealment:



### R40VN – WITH COVER


Rosette for concealed double screwing, with separate cover. Outside  $\varnothing$  40 mm, drilling distance 28 mm, total height 6 mm. For 6 mm countersunk screws. Solid stainless steel, finely turned.

Also available as:


**R55VN** – Outside  $\varnothing$  55 mm, drilling centres 37 mm, thickness 6 mm.

**R70VN** – Outside  $\varnothing$  70 mm, drilling centres 53 mm, thickness 8 mm. With M8 thread. Including Hilti fastening material\*.

R55VN Side view:




R55S Top view:



### R55S

Rosette for visible double screwing. Outer  $\varnothing$  55 mm, drilling distance 37 mm, including two 5 mm stainless steel countersunk screws. Solid stainless steel, finely turned.

R55S Side view:







ROV23-B4 | ROV28-B4 | ROV30-B4

## ROSETTE | OVAL


ROV23-B4 Side view:




ROV23-B4 Top view:

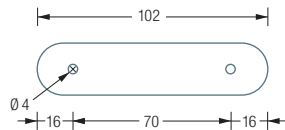

ROV23-B6 Side view:



ROV23-B6 Top view:

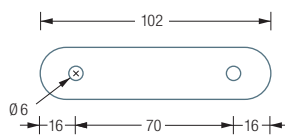

### ROV23-B4

Oval rosette, length 102 mm, height 23 mm. With two screwing points  $\varnothing$  4 mm for M4 screws.

Solid stainless steel, horizontally brushed.

Also available as:

**ROV28-B4** – Height 28 mm, fixing point  $\varnothing$  4 mm

**ROV30-B4** – Height 30 mm, fixing point  $\varnothing$  4 mm

**ROV23-B6** – Height 23 mm, fixing point  $\varnothing$  6 mm

**ROV28-B6** – Height 28 mm, fixing point  $\varnothing$  6 mm


**ROV30-B6** – Height 30 mm, fixing point  $\varnothing$  6 mm

For pairs of hooks


Mounting material for wall fixing included with hook

## MOUNTING VARIANT SUCTION CUP

SN50-11 Side view:



SN80-16 / -16S Side view:

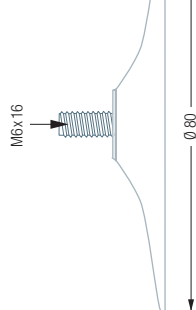

### SN50-11

Suction cup\*. Outer  $\varnothing$  50 mm, M4 x 11 mm V2A thread. Colourless.

Also available as:

**SN80-16** – Outside- $\varnothing$  80 mm, M6 x 16 mm thread. Colourless.

**SN80-16S** – Outside- $\varnothing$  80 mm, M6 x 16 mm thread. Black.

For the flexible attachment of clothes and towel hooks

Hook HN20-40 see page 91

\*Material: PVC, phthalate free.



SN50-11 | SN80-16 | SN80-16S



SN80-16 | HN20-40



ROSE WITH ADHESIVE ADAPTER  
RNB40-6 TOWEL HOOK HA2-RS




ADHESIVE PLATE KT40-6  
COAT HOOK H18-50

## MOUNTING VARIANT | GLUING

### WITH NEVER DRILL AGAIN ADHESIVE SET\*

For temporary bonding on rough and smooth surfaces, can be removed without leaving any residue



#### RNB40-6


Rosette with concealed adhesive adapter. Outer  $\varnothing$  40 mm, height 6 mm, with M4 x 6 mm thread. Solid stainless steel, finely turned. Including never-drill-again adhesive set\*, load capacity approx. 3 kg. For gluing e.g. on tiles.

Also available as:


**RNB45-6** – Outside  $\varnothing$  45 mm, with M6 x 7 mm, Load capacity approx. 3 kg.

**RNB55-6** – Outside  $\varnothing$  55 mm, with M6 x 7 mm, Load capacity approx. 7,5 kg.

RNB40-6  
Side view:




RNB40-6  
Top view:




RNB45-6  
Side view:




RNB45-6  
Top view:



RNB55-6  
Side view:



RNB55-6  
Top view:



### FOR DIRECT BONDING WITH ADHESIVE PLATE

For permanent bonding on smooth surfaces such as glass, tiles, etc.

#### KT28-5


Adhesive plate, outer  $\varnothing$  28 mm, height 5 mm, with M4 x 8 mm thread. Including adhesive pad for direct adhesion e.g. on tiles. UV bonding on glass is also possible.

Also available as:

**KT40-6** – Outside- $\varnothing$  40 mm, Height 6 mm, M6 x 10 mm thread.

**KT55-6** – Outside- $\varnothing$  55 mm, Height 6 mm, M6 x 10 mm thread.


KT28-5  
Side view:




KT28-5  
Top view:




KT40-6  
Side view:




KT40-6  
Top view:



KT55-6  
Side view:



KT55-6  
Top view:





CONCEALED POT MAGNET RTM45-11 | COAT HOOK H20-100

## MOUNTING VARIANT I MAGNET


### WITH COVER

#### RTM36-10

Pot magnet\* with threaded pin and enclosing cover made of solid stainless steel, finely turned. outer  $\varnothing$  36 mm, height 10 mm, with M6 x 9 mm thread. Adhesive force approx. 39 kg.

Also available as:

**RTM45-11** – Outside- $\varnothing$  45 mm, Height 11 mm, with M8 x 9 mm thread. Holding force approx. 45 kg.

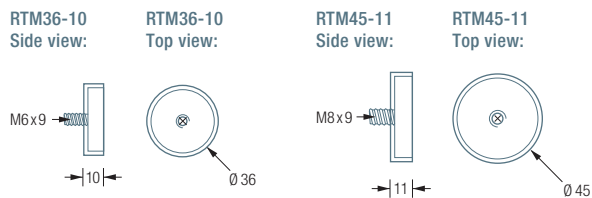

RTM45-11



TM40-9


### WITH RUBBER CAP

#### TM32-8

Simple pot magnet\* with threaded pin, outer  $\varnothing$  32 mm, height 8 mm, with M6 x 11 mm thread. Including black rubber cap for surface protection. Adhesive force approx. 39 kg.

Also available as:

**TM40-9** – Outside- $\varnothing$  40 mm, Height 9 mm, with M8 x 11 mm thread. Holding force approx. 45 kg.

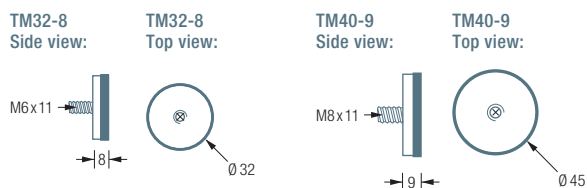

RTM36-10 | RTM45-11



## GH-SYSTEM HOOK

An intelligent construction of rotatable hooks on an axis, which can be combined as desired.

Both are based on this system  
the stand wardrobe Take 1 (see p. 7),  
as well as the Take 5 hanging wardrobe  
(see p. 36).





GH2




GH4-2

## COAT HOOK GH-SYSTEM HOOK

Can be combined with additional rosettes, see p. 93 ff

Including mounting material for wall fixing

For alternative attachments, see p. 298 f.

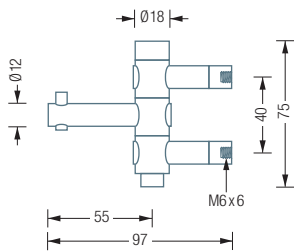

### GH1

Coat hook with a rotating coat hook, height 75 mm. Solid stainless steel, hand-ground to a silky matt finish.

Also available as:


**GH2** – with two rotating coat hooks, height 105 mm.

**GH3** – with three rotating coat hooks, height 135 mm.


**GH4** – with four rotating coat hooks, height 165 mm.

**GH4-2** – with three rotating coat hooks and one longer extension hook, height 165 mm.


GH2 Side view:

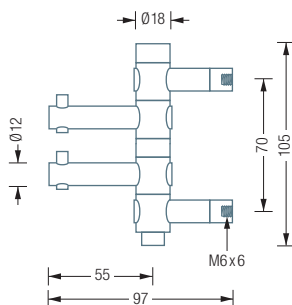


GH3 Side view:

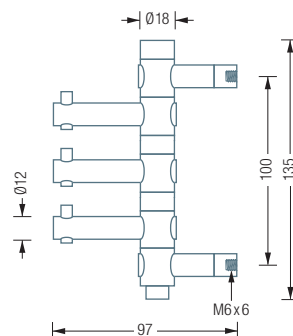

GH4 Side view:

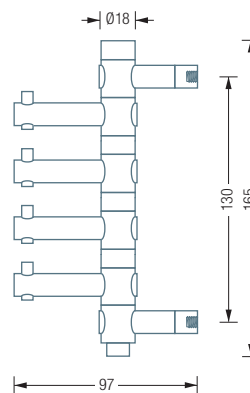

GH4-2 Side view:

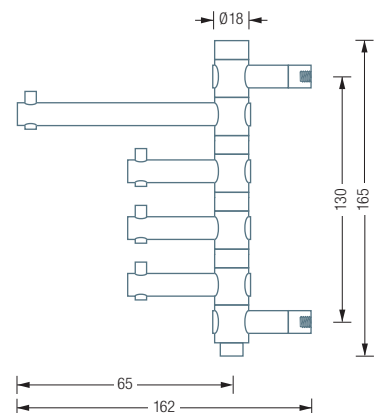




GH3H UV-GLUED WITH ADHESIVE PAD



GHE65 | GHE130

## COAT HOOK | GH-SYSTEM HOOK


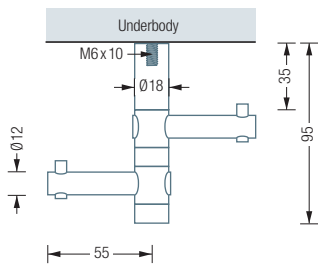


### GH2H

Hanging coat hook with two 360° rotatable hooks. For shelves and cabinet bottoms. screwing from above. Solid stainless steel, hand-ground to a silky matt finish.

Also available as:

**GH3H** – with three 360° rotatable hooks.

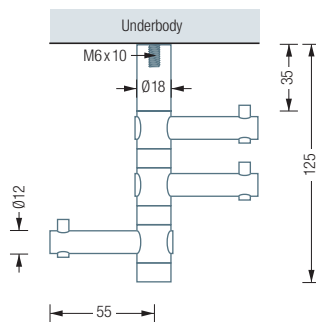


### GHE65

Extension / alternative hook rotatable by 360°, length 65 mm. Solid stainless steel, hand-ground to a silky matt finish.

Also available as:

**GHE130** – Long 130 mm.

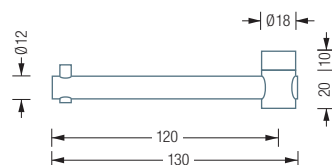


The hooks can be combined as desired  
Can be combined with additional rosettes, see p. 93 ff.

Including mounting material, hanger bolt for direct underbody mounting


For alternative attachments, see p. 298 f.

It can also be attached to glass shelves with a glass screw using UV bonding - please specify when ordering

Mounting through cabinet bottom:




Bonding:






Clothes hangers see page 80  
Including mounting material for wall fixing  
Can also be screwed on the back  
– please specify when ordering

## STAINLESS STEEL HOOK LONG

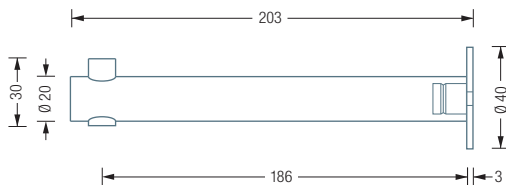

### H20-200


Extremely stable stainless steel hook with pin and hat rosette R40H for 6 mm hexagon screw. Ø 20 mm, length 203 mm. Solid stainless steel, hand-ground to a silky matt finish.

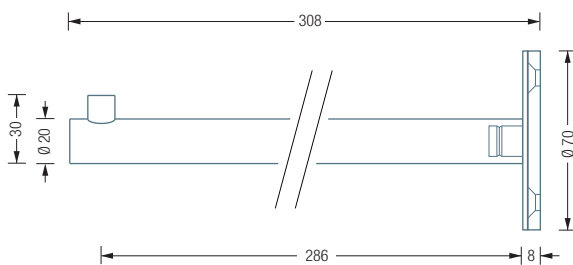

### H20-300T

Extremely stable stainless steel hook with partially countersunk pin and rosette R70VN for concealed screwing Hilti fastening material\*. Ø 20 mm, length 308 mm. Solid stainless steel, hand-ground to a silky matt finish.

#### H20-300T Wall mounting:

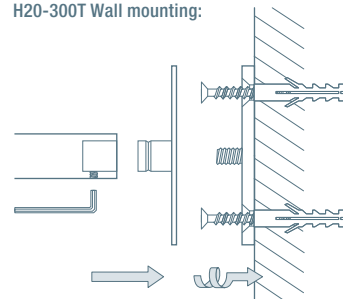


\*Stainless steel countersunk screw d 7 x 60 mm with frame dowel 10 mm (HRD-CR 10 x 60).



KH | KB1



KH | KB1

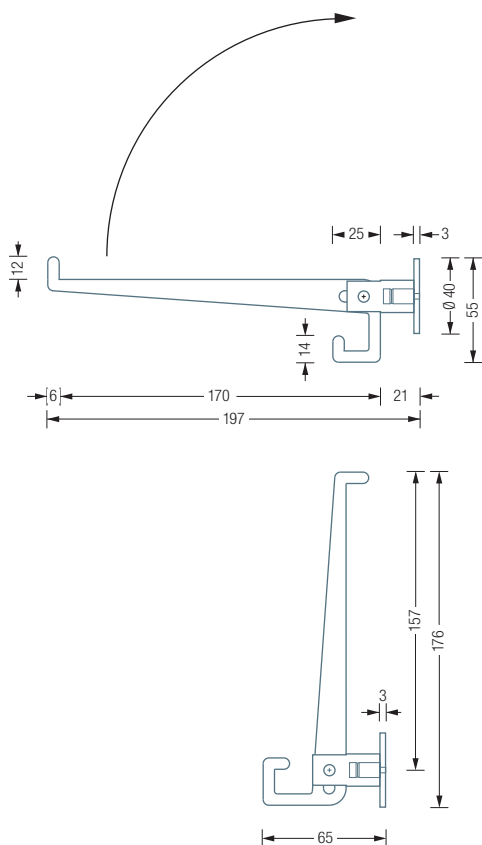


## FOLDING HOOK

### KH

Hinged hook including rosette R40. Can be used as a coat and coat hanger hook. Lasered hook element. Solid stainless steel, hand-ground to a silky matt finish. Material thickness 6 mm. Mounting through concealed countersunk sleeve for 6 mm screw..

Wall mounting with countersunk sleeve and rosette:

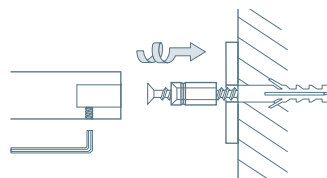

Coat rail HLS5H see page 104  
Including mounting material  
for wall fixing

Can also be screwed on the back –  
please specify when ordering



CLOAKROOM SOLUTIONS LTD  
info@cloakroomsolutions.co.uk  
020 3011 1014  
cloakroomsolutions.co.uk